




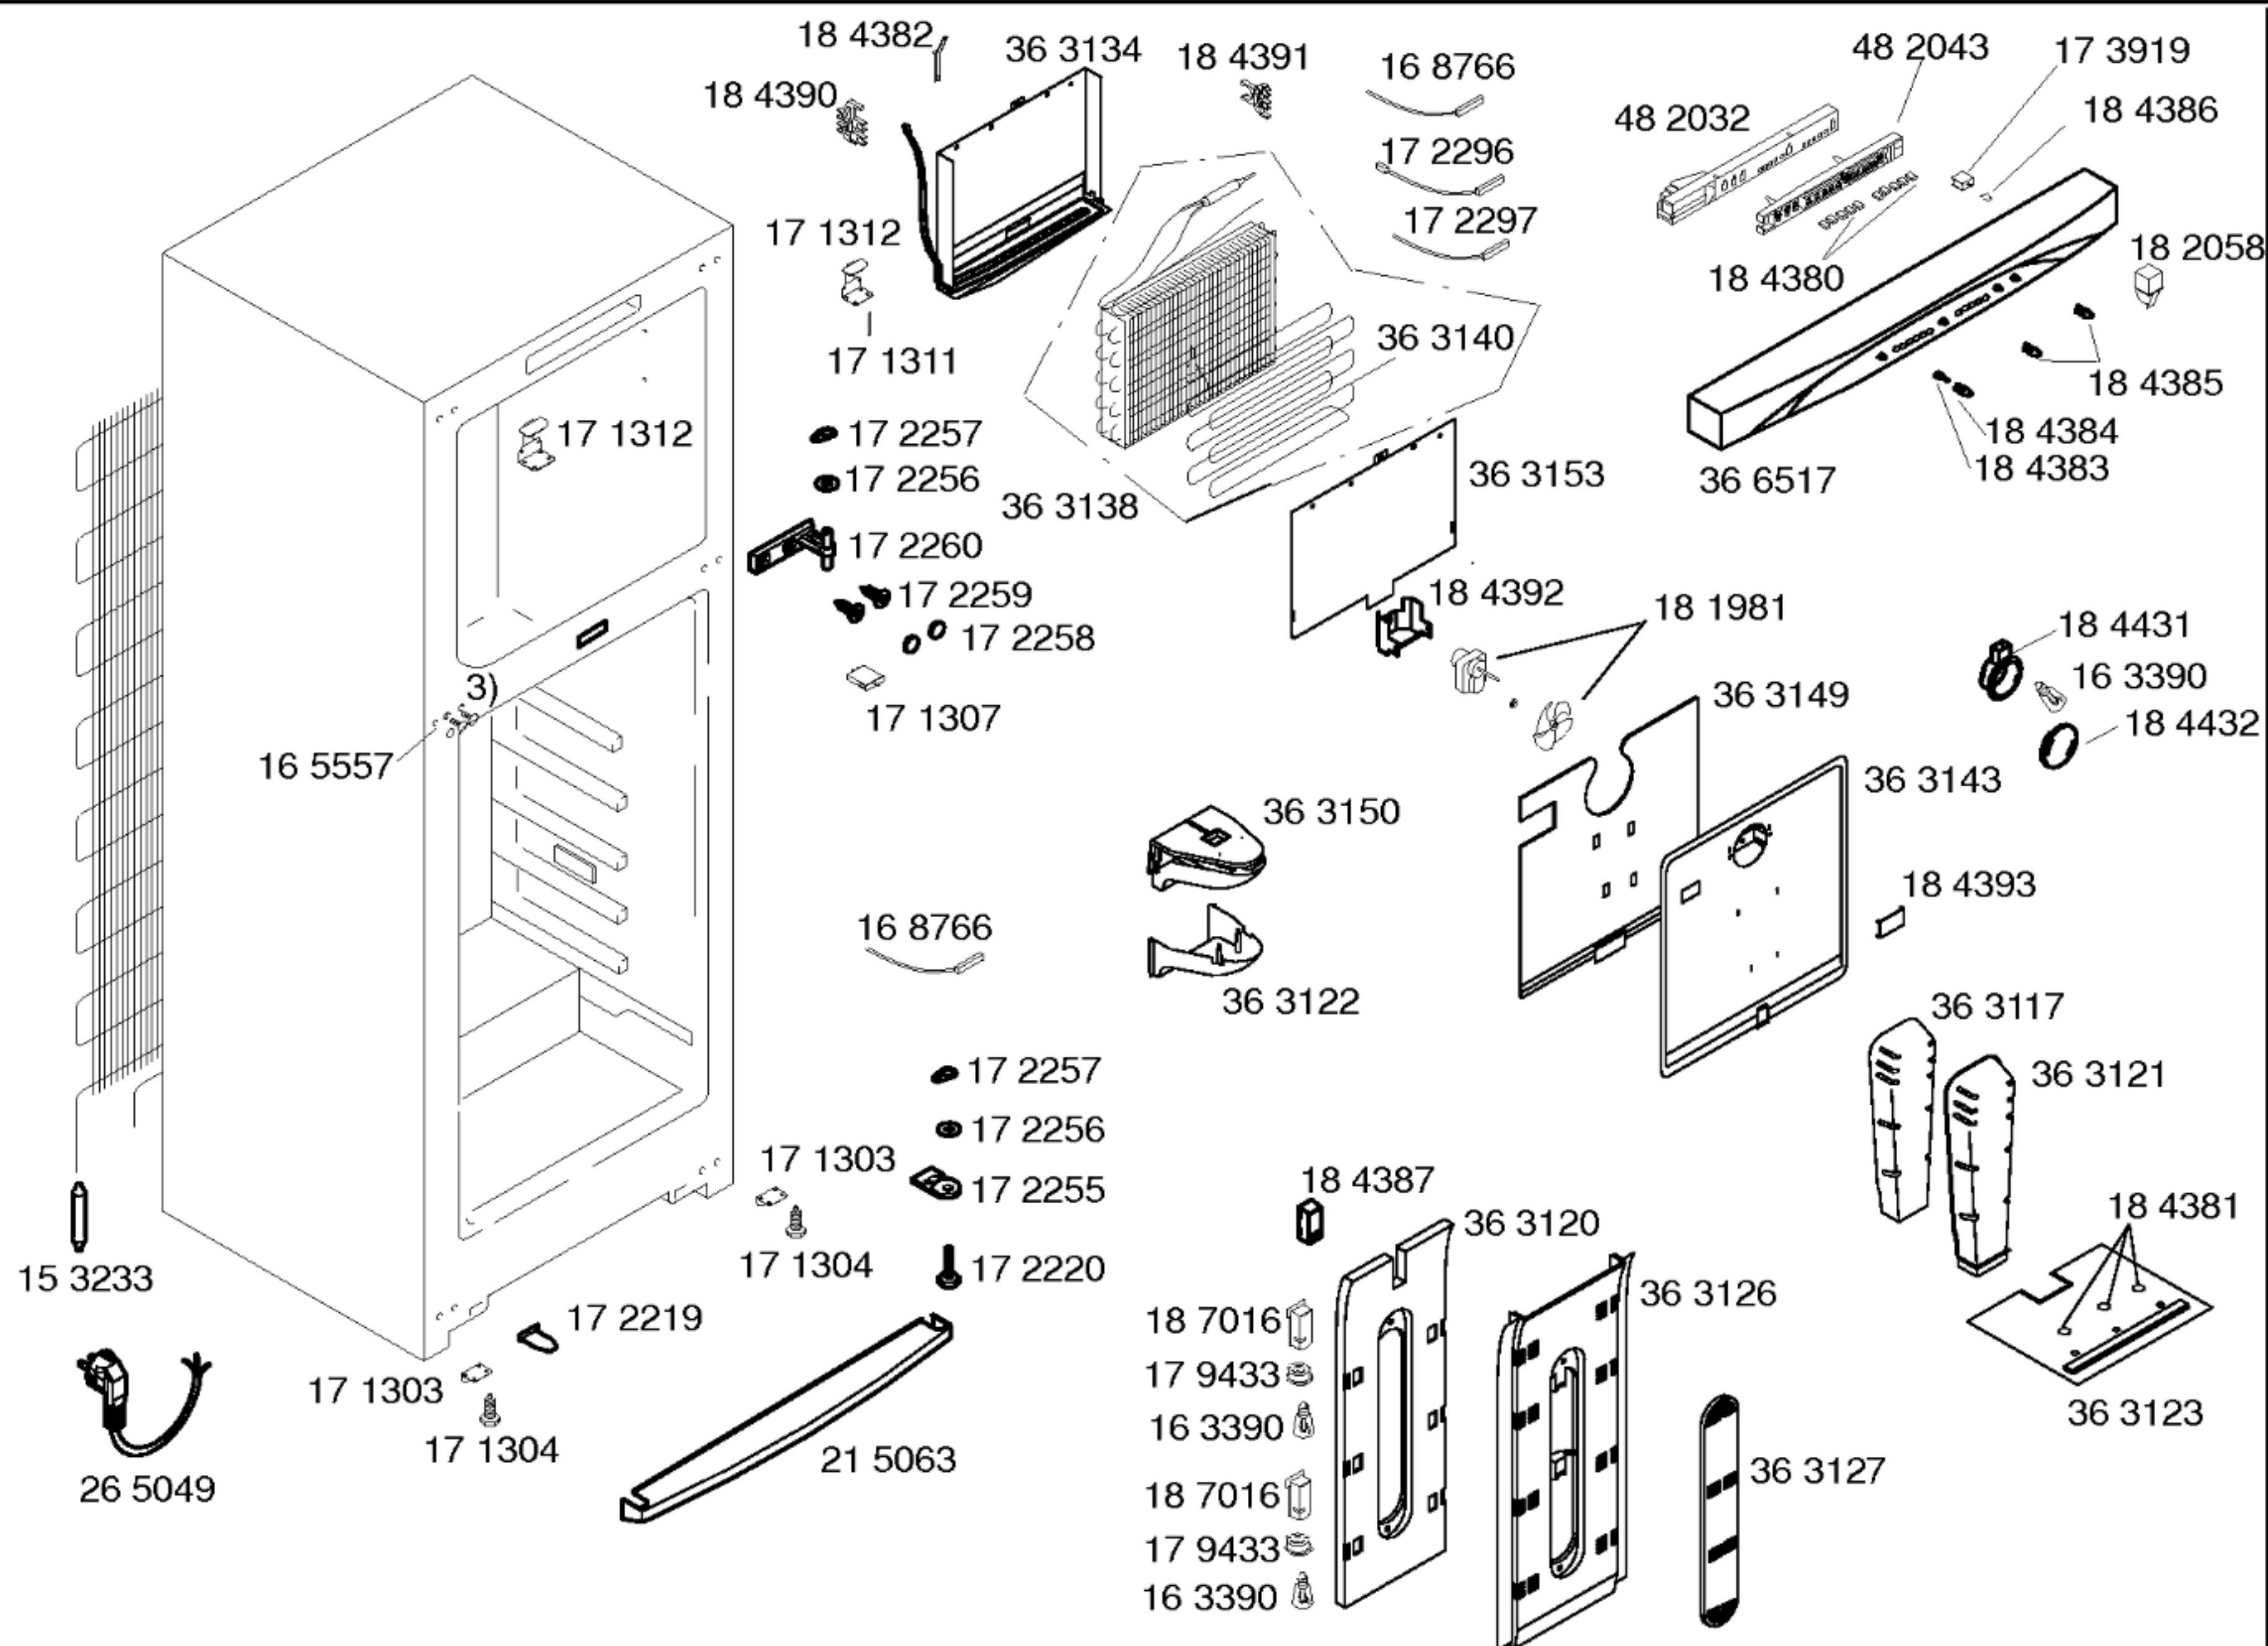

Gebrauchsanweisung  
58 0937  
(el,en)

1) 16 5552

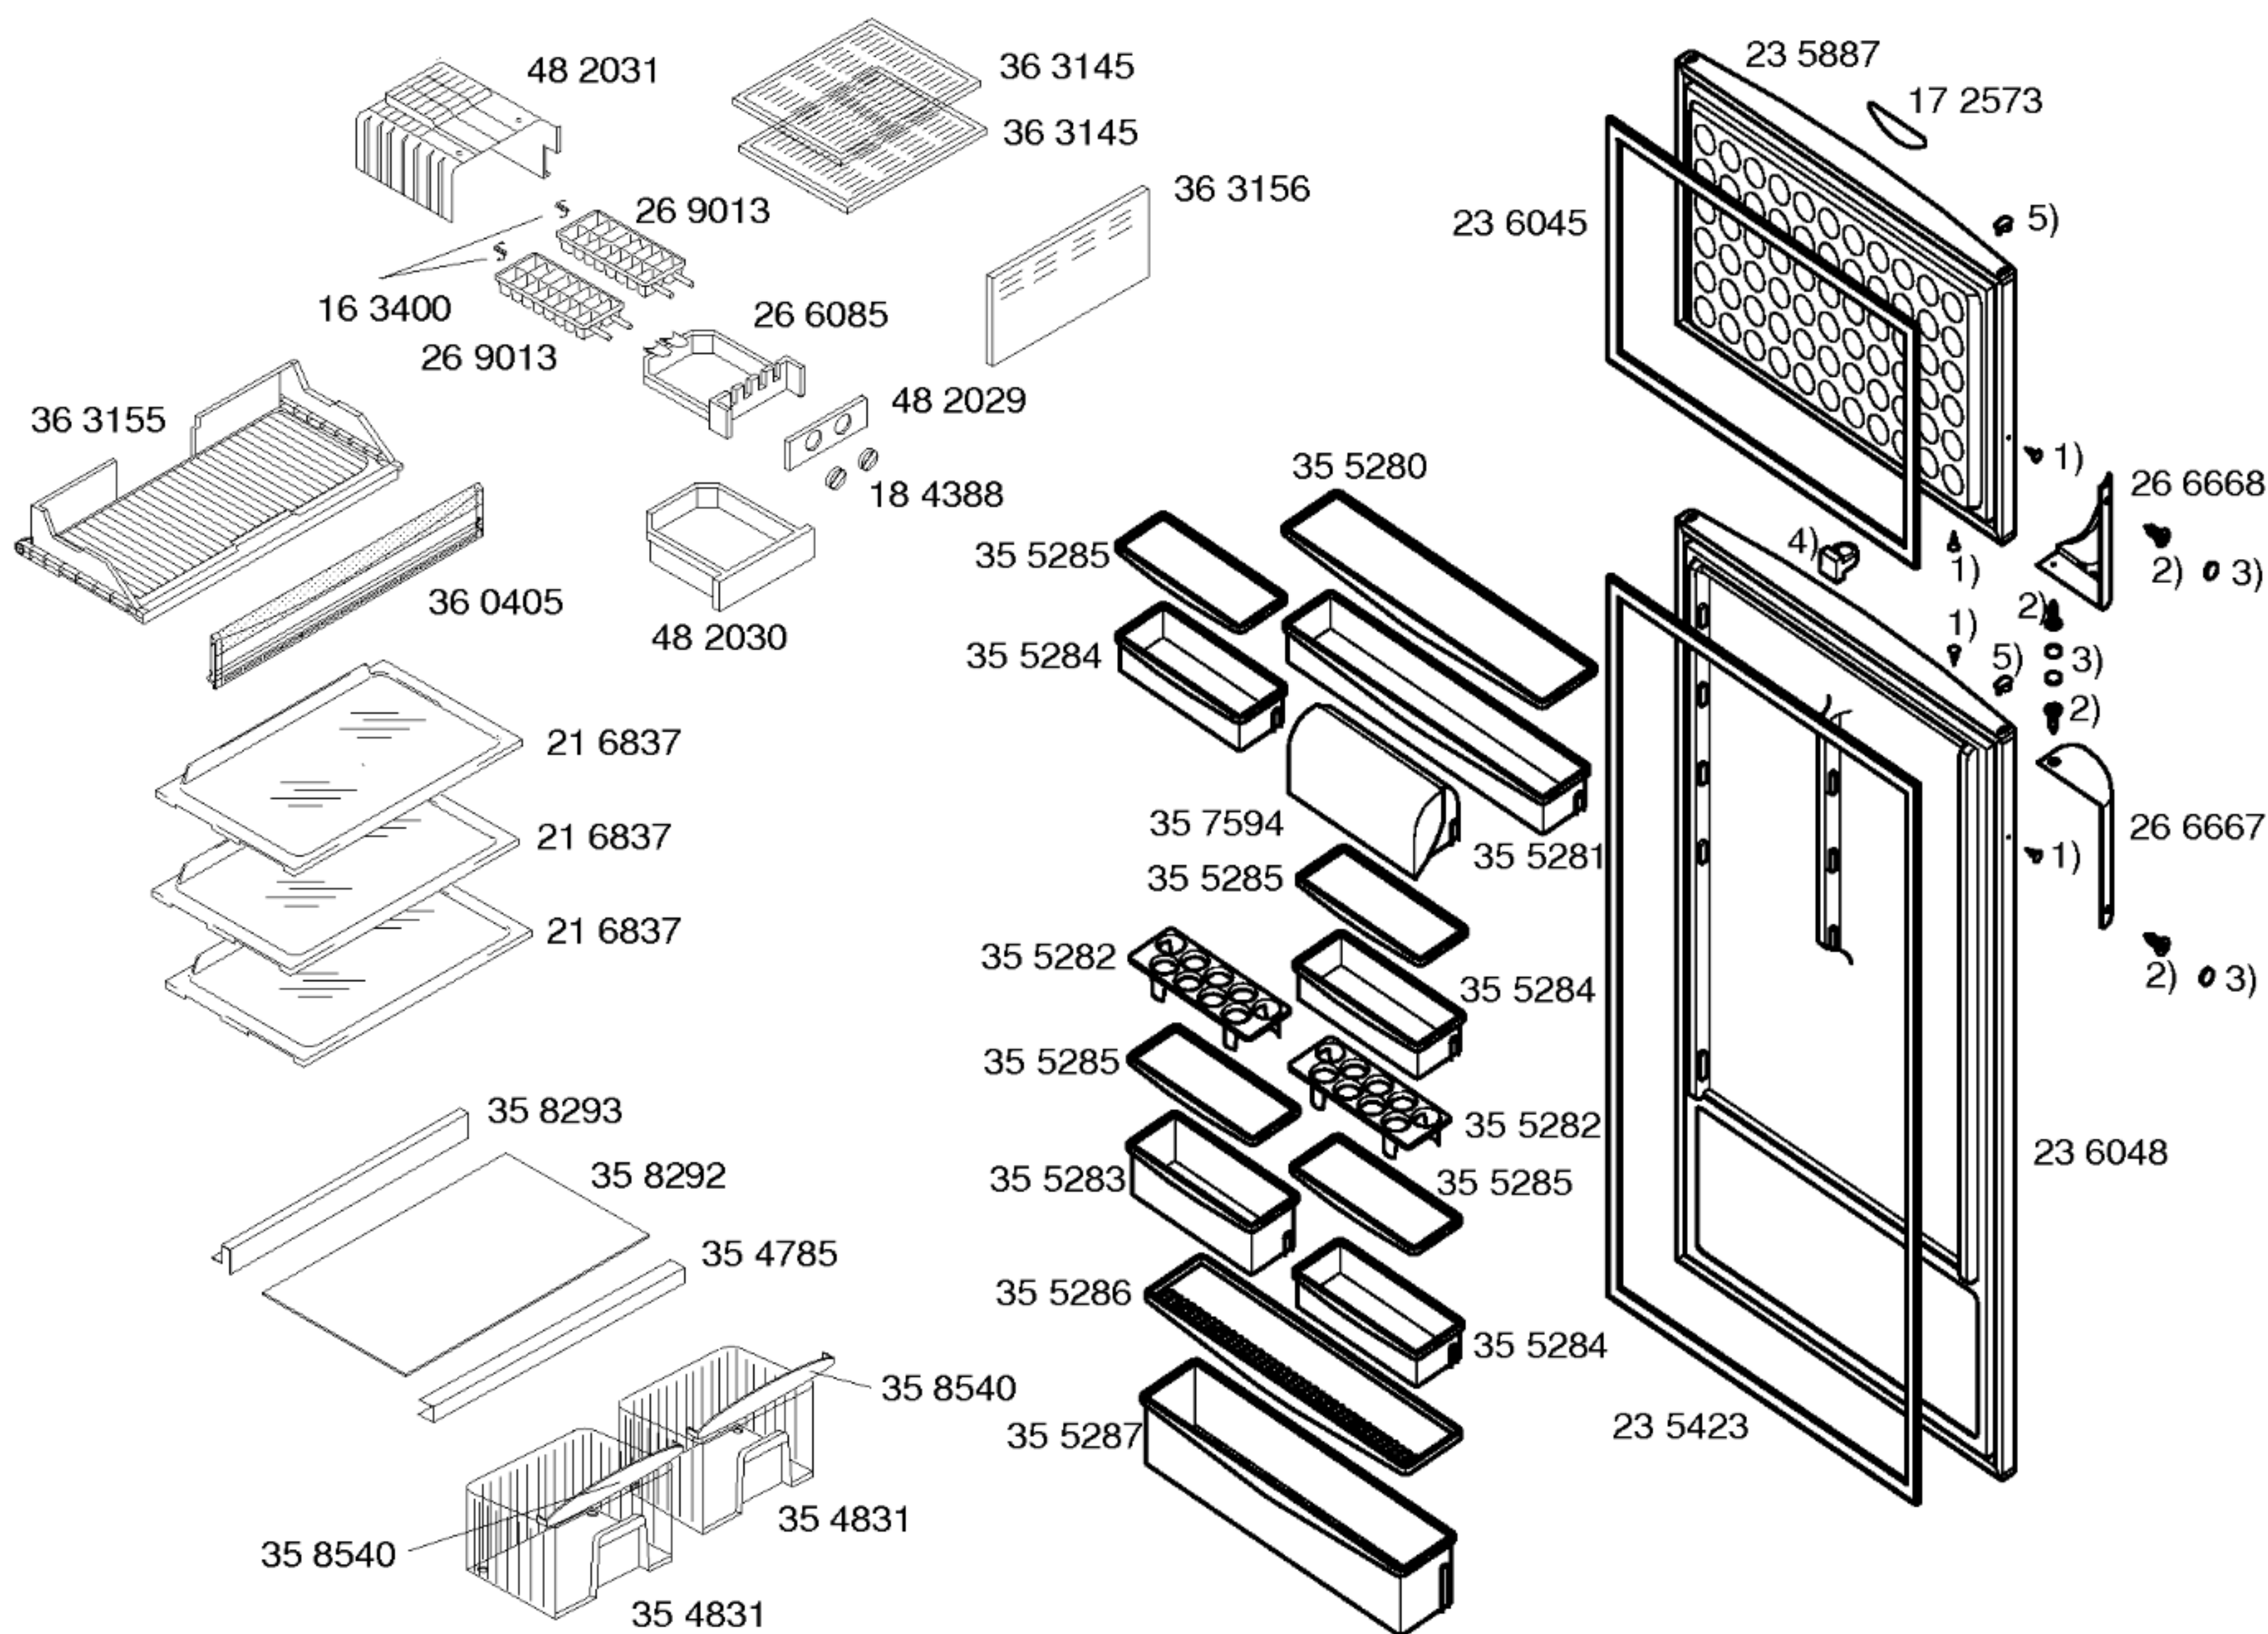

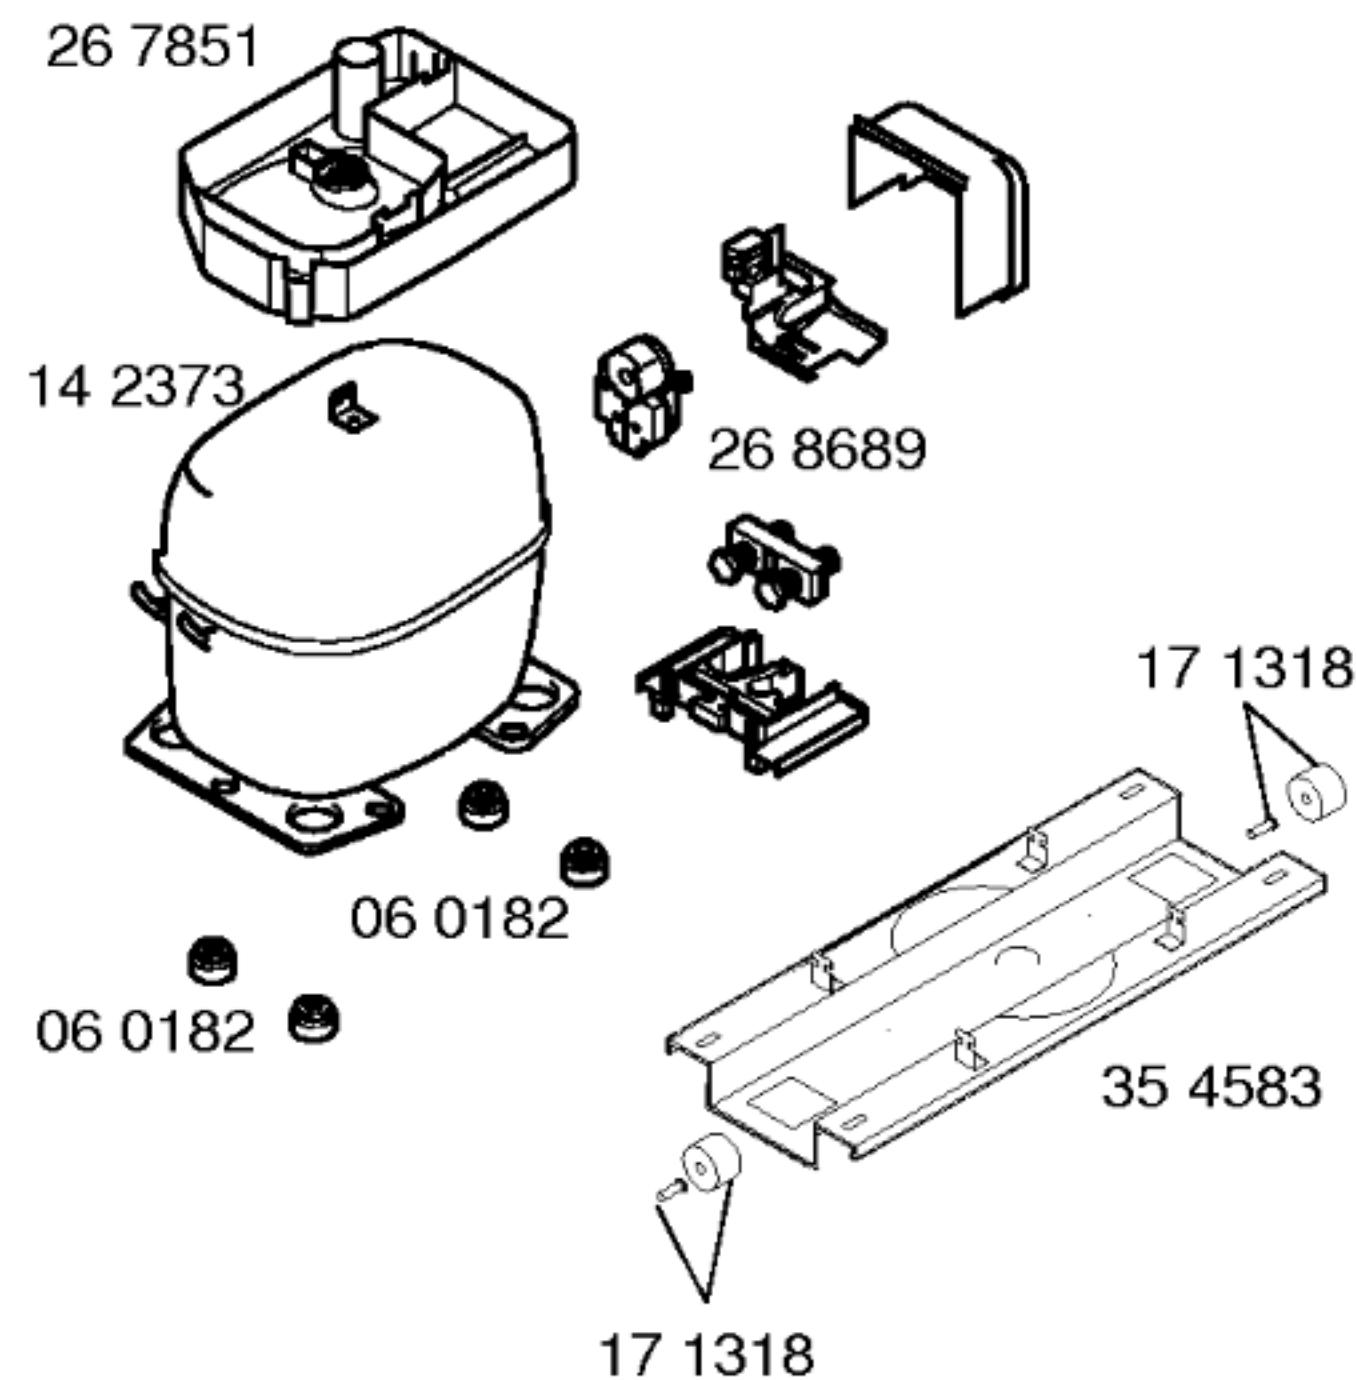

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS                                                                                                                                                                             |  |                                                  |                                |                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------|--------------------------------|-----------------------------|
|                                                                                                                                                                                                                                               |  |                                                  |                                |                             |
| Verdichter/Compressor/Compresseur/Compresor<br>Typ/Type/Tipo<br>Förderleistung/Delivery/Debit/Aspiración l/h<br>Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A<br>Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm<br>Hi/aux. |  | ASPERA<br>NBT 1118Y<br>2574<br>—<br>11.0<br>16.4 |                                |                             |
| Klappe Therm./Thermostat/Termostat<br>Typ/Type/Tipo<br>Reglerstellung/Position/Conexión<br>Schaltwerte/Switching values/ ..ein/conex. °C<br>Valeurs de commutation/Desconex. ..aus"/descon.<br>(..abtaven' od) ..alarm'                       |  |                                                  |                                |                             |
| Füllmenge/Fill. quantily/Charge/Carga R600 g                                                                                                                                                                                                  |  | 45                                               |                                |                             |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc. W                                                                                                                                                                                            |  | 150                                              |                                |                             |
| Heizung/Heater/Chauflage/Resistenc.descong.<br>Widerstand/Resistance/Resistencia KΩ<br>Leistung/Power/Puissance/Potencia W                                                                                                                    |  | Verdampfer<br>0.38<br>145/230                    | Ablaufrinne<br>1.4<br>37.5/230 | Luftkanal<br>13.49<br>4/230 |
| Ventilador/Blower/Ventilateur/Ventilador<br>Widerstand/Resistance/Resistencia KΩ                                                                                                                                                              |  | Verdichter<br>0.61                               | Verdampfer<br>0.41             |                             |