



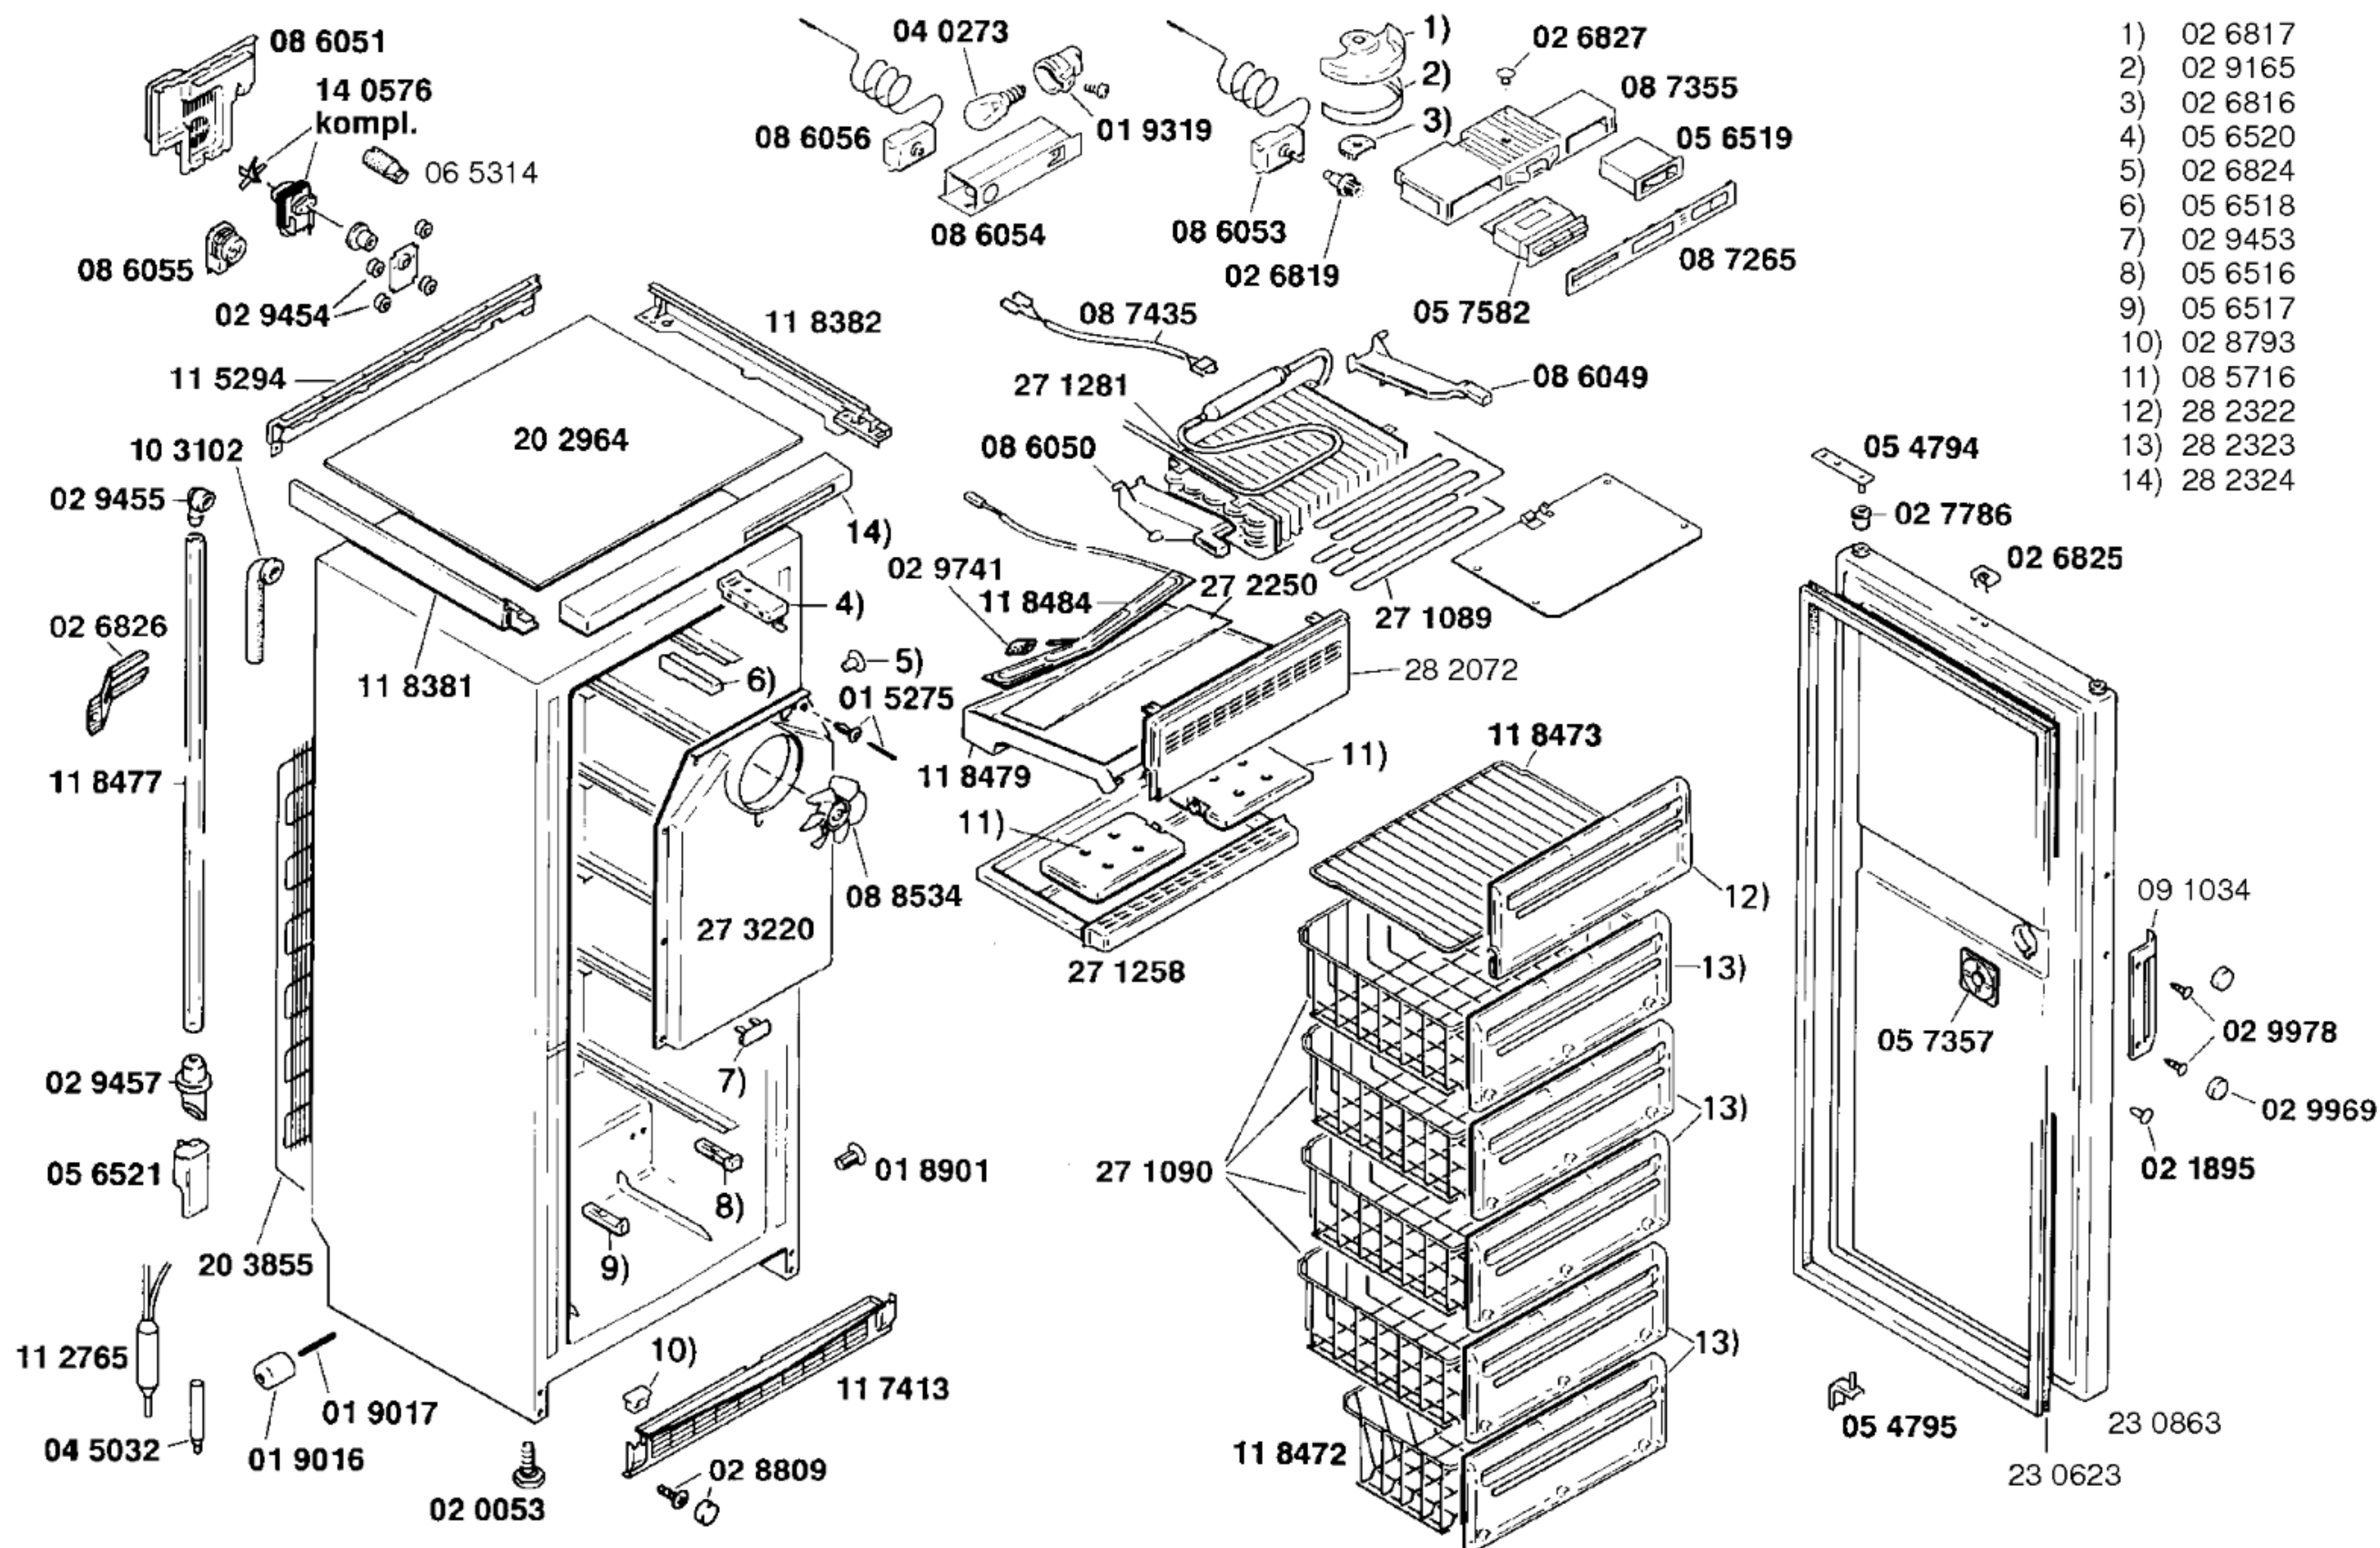

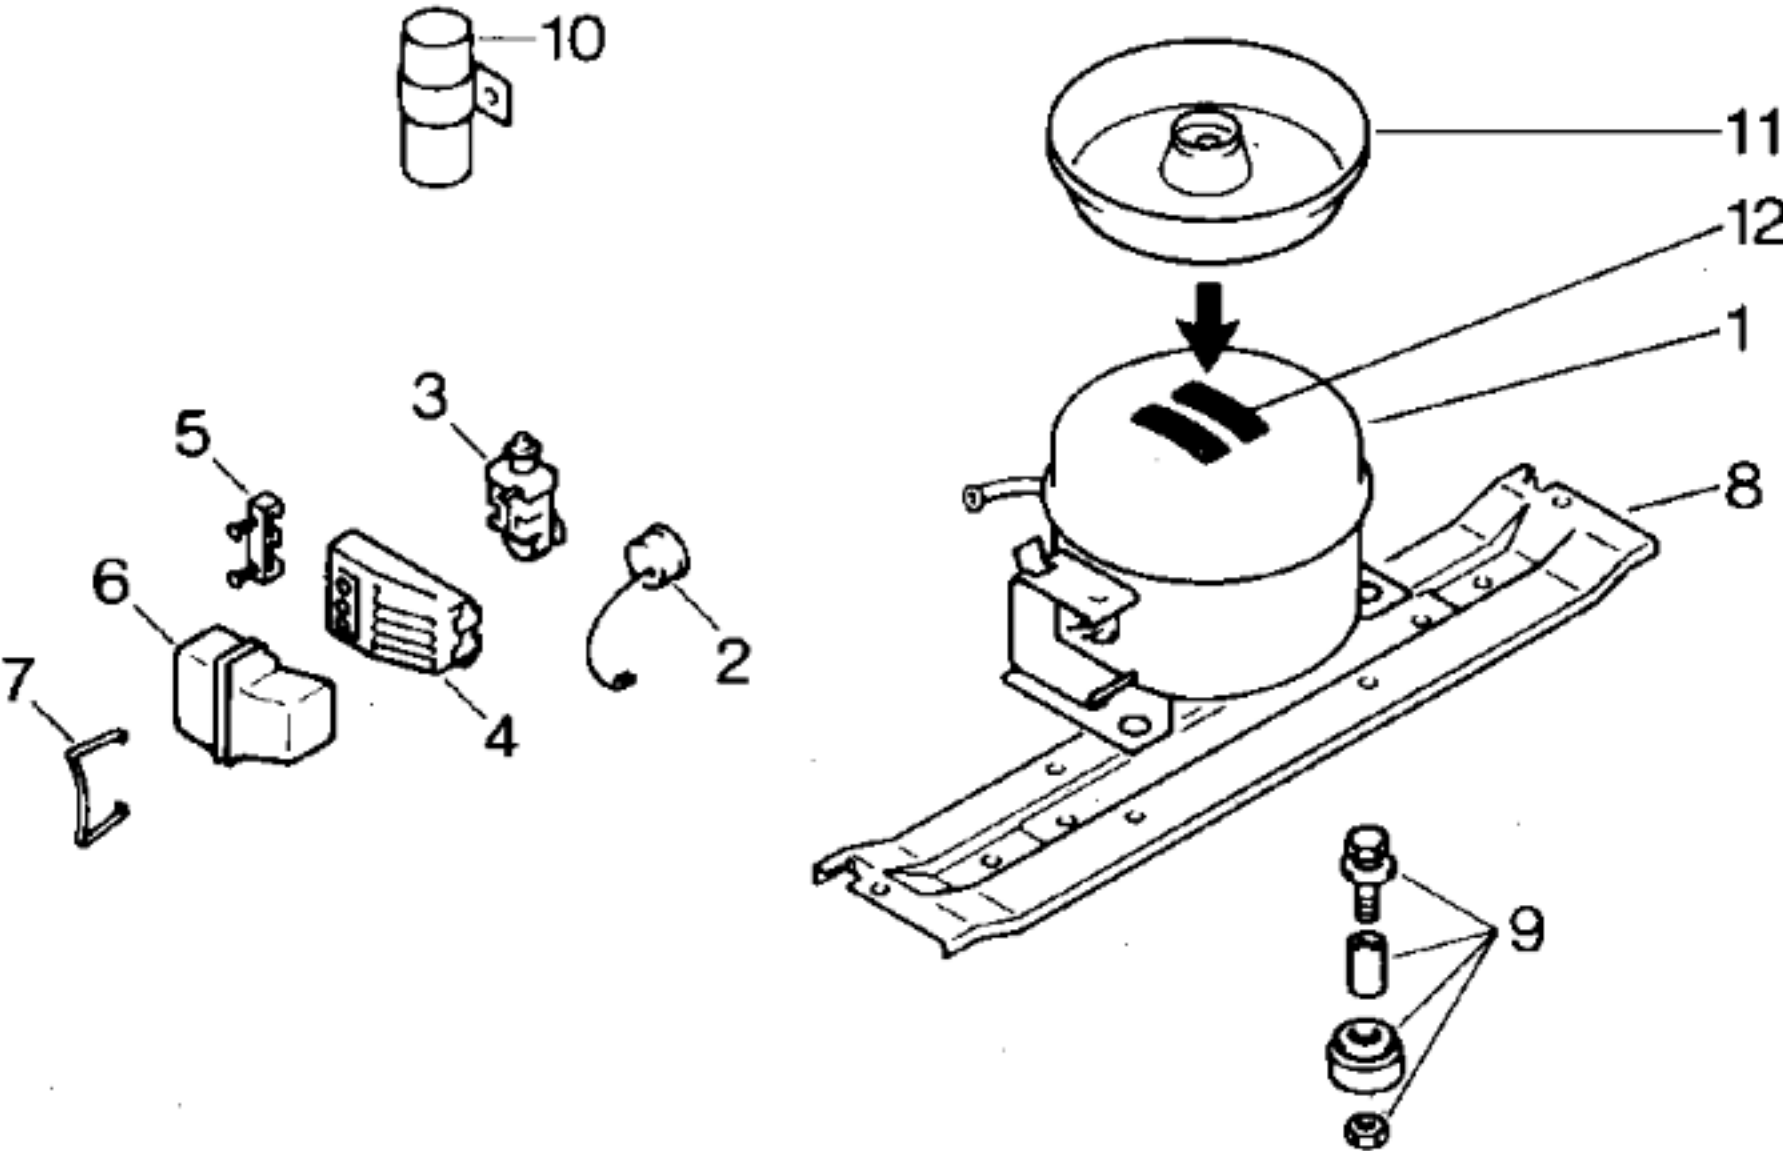

Pos.			
	Matsushita		
	D116-L RAA		
1	14 0563		
2			
3	05 8506		
4	05 5516		
5			
6	05 8458		
7	02 6731		
8	27 3219		
9	05 0166		
10	05 8459		
11	08 8535		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Matsushita			
Typ/Type		D116LRAA			
Förderleistung/Delivery/Débit		l/h	1184		
Anlaufstrom/Starting current/Cour de démarrage		A	8,75		
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	12,0	
		Hi/aux	Ω	28,7	
Temp.-Regler/Thermostat		Danfoss		Ranco	
Typ/Type		077B0/09IX4742		K50H5658	
Reglerstellung/Position		kalt	warm	ein	aus
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	°C	-26,9	-18
		„aus“		-33,5	-23
(„abtauen“ od.)		„alarm“		-12	-15
Füllmenge/Fill.quantity/Charge		R12	g	220	
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung	
Widerstand/Resistance/Résistance		Ω	173	6050	
Leistung/Power/Puissance		W	333	9,5	
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω	340		
Schaltuhr/Timer/Minuterie de contact					
Widerstand/Resistance/Résistance		Ω	6500		
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			