



07 4445

35 4305

16 9300

48 1572
Set

35 2470

15 3429

35 3208
kompl.

02 9965

029966

05 9129

09 2894

02 9963

17 0218

16 9318

18 1965

17 0616

17 0617

17 3206

17 0332

17 0330

17 1320

17 0618

26 5482

16 9314

16 9313

23 5128


09 3110

06 5644

Gebrauchsanweisung
52 8708
(D,GB,F,I,NL)

Montageanleitung
52 3227
(D,GB,F,I,NL,DK,N,SF,
SE,TR)

Beistellsatz
26 6056

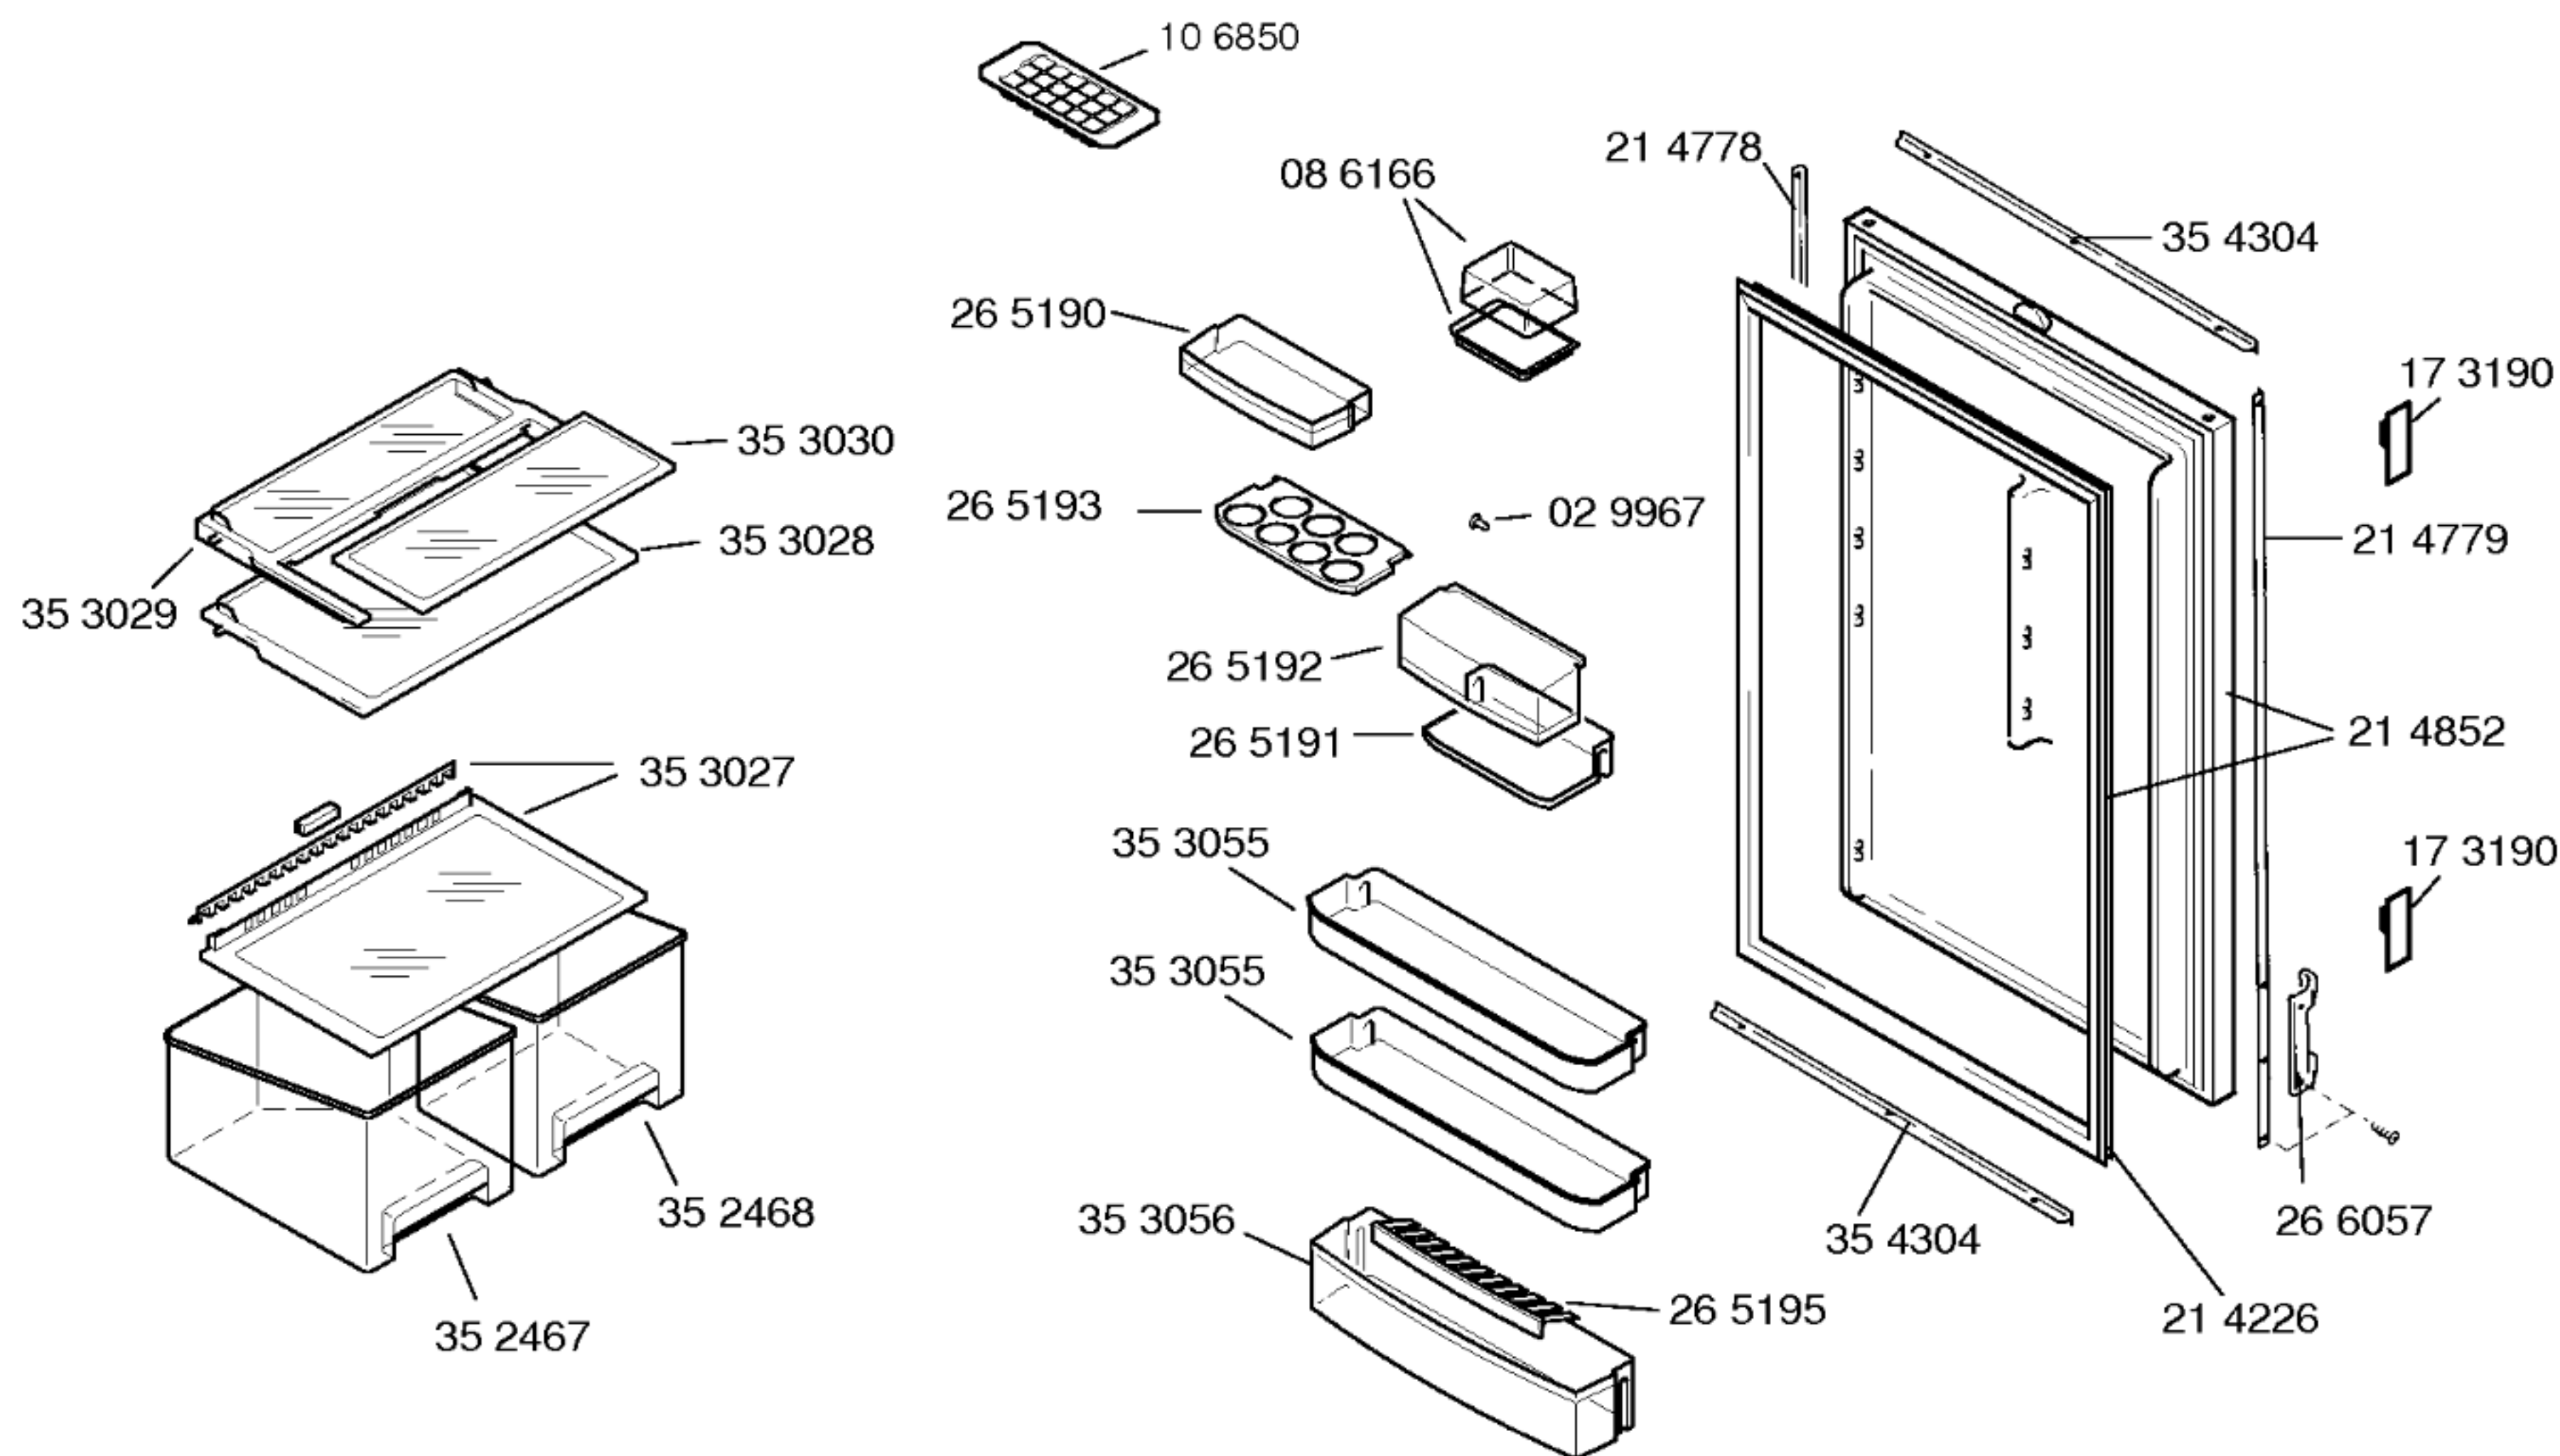

Ausgleichsblenden
braun

Z4210B1 37mm

Z4220B1 57mm

Alu

Z4210A1 37mm

Z4220A1 57mm


Dekorrahmen

braun

Z4130B1 880mm

Z4160B1 1225mm

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

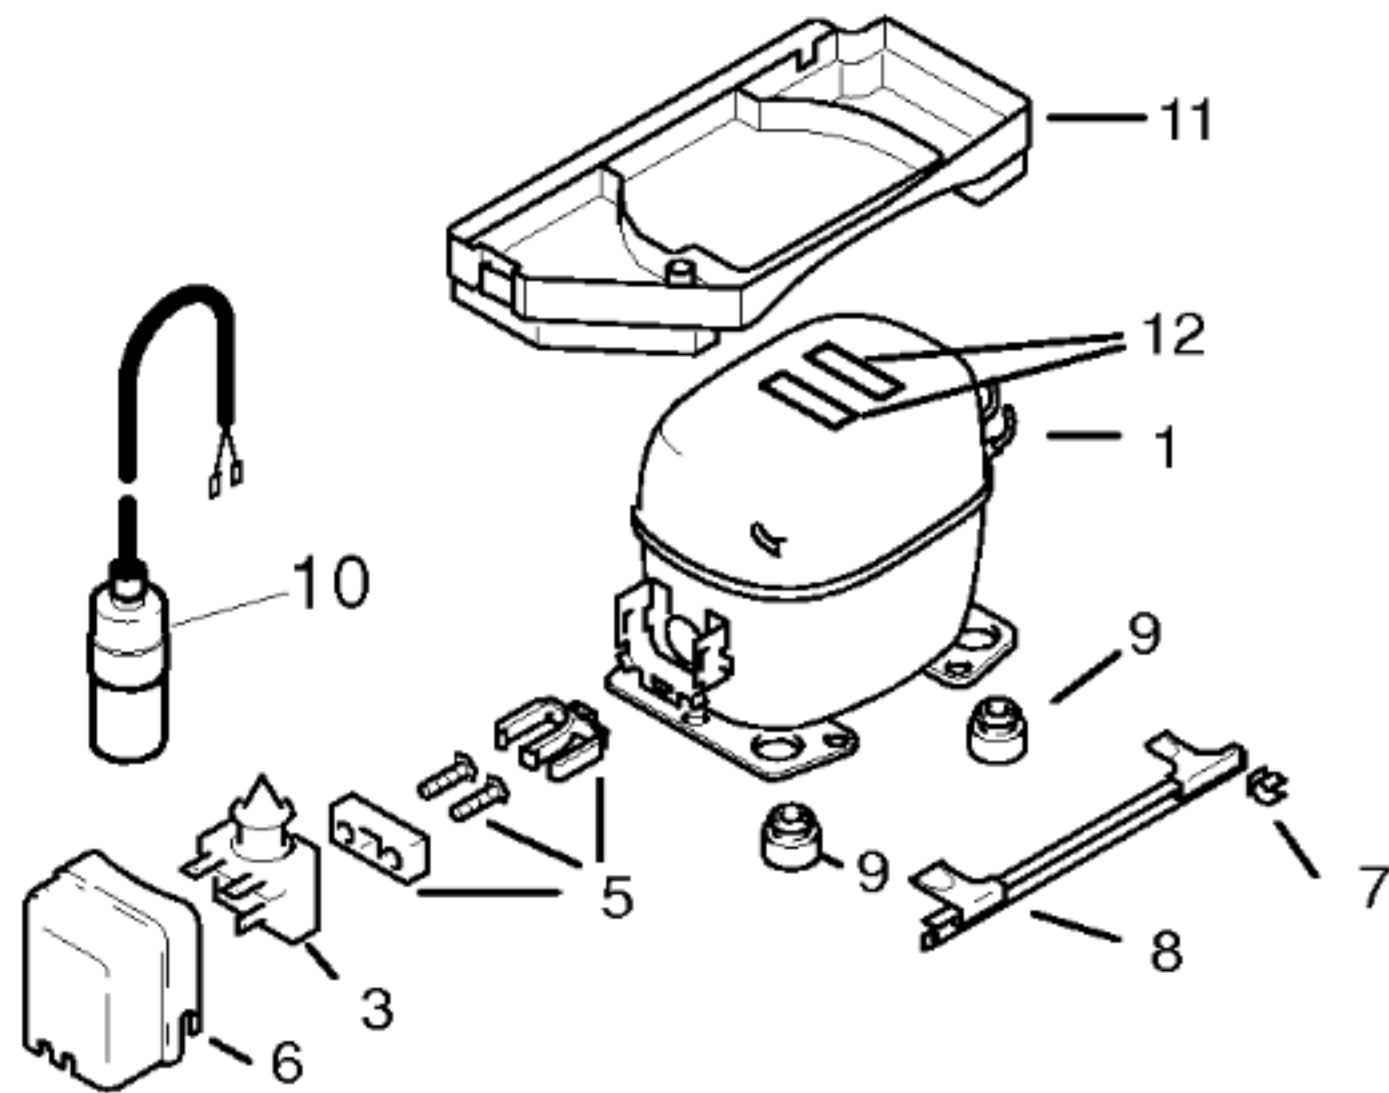

	V01	V02	
Pos.	Danfoss	Aspera	
	TLY 6K	BPK 1084Y	
1	14 1680	14 2101	
2			
3	15 1055	18 0819	
4			
5	15 0760	17 0882	
6	15 1072	17 0881	
7		16 9319	
8	26 4879	26 4879	
9	05 0166	05 0166	
10	16 5852		
11	35 4549	36 5099	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Aspera
Typ/Type		TLY 6K		BPK 1084Y
Förderleistung/Delivery/Débit	l/h	1026		1201
Anlaufstrom/Starting current/Cour de démarrage	A	4,4		3,6
Widerstand/Resistance/Résistance	Ha/main/prin	W 34,0		29,6
	Hi/aux	W 41,0		39,1
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K59		
Regelstellung/Position		kalt	warm	
Schaltwerte/Switching values	"warm"	+4,0	+4,0	
Valeurs de commutation	"kalt"	-32,0	-12,0	
	"alarm"			
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	68	79
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	W			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	W			
Temp.-Regler/Thermostat				
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	W			
Spannung/Voltage/Tension	V			

* siehe Typenschild