
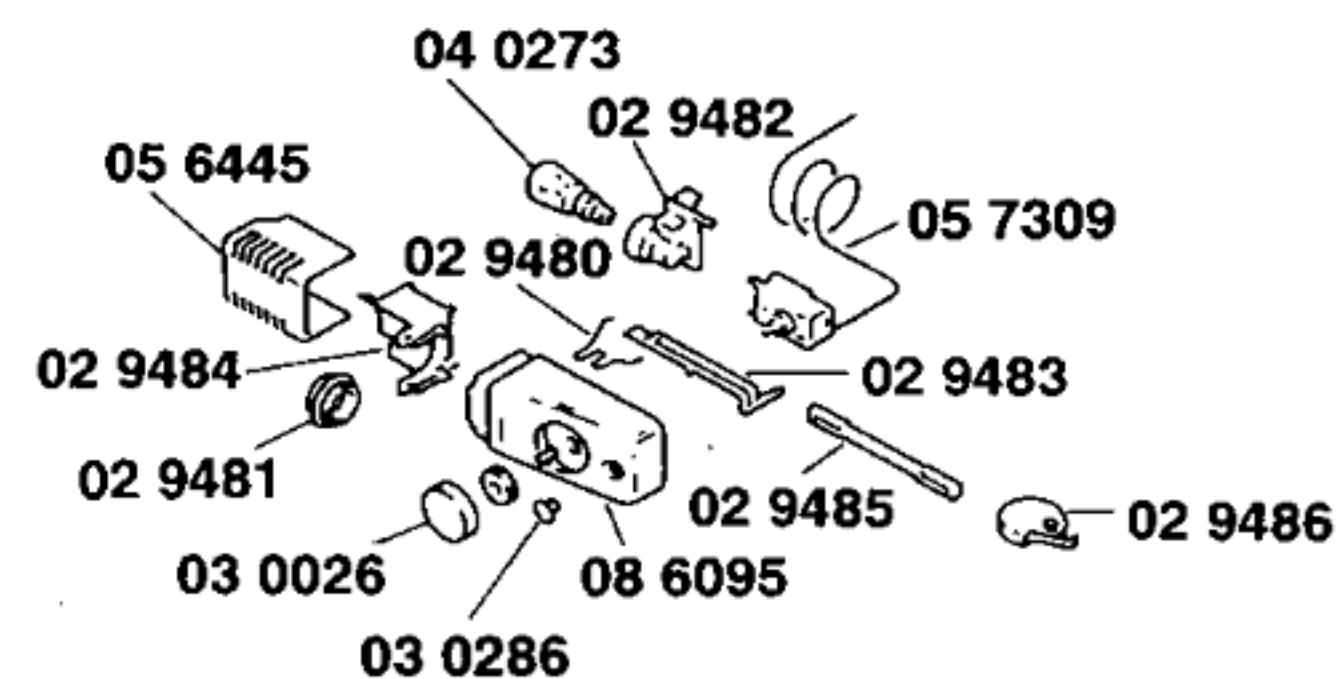


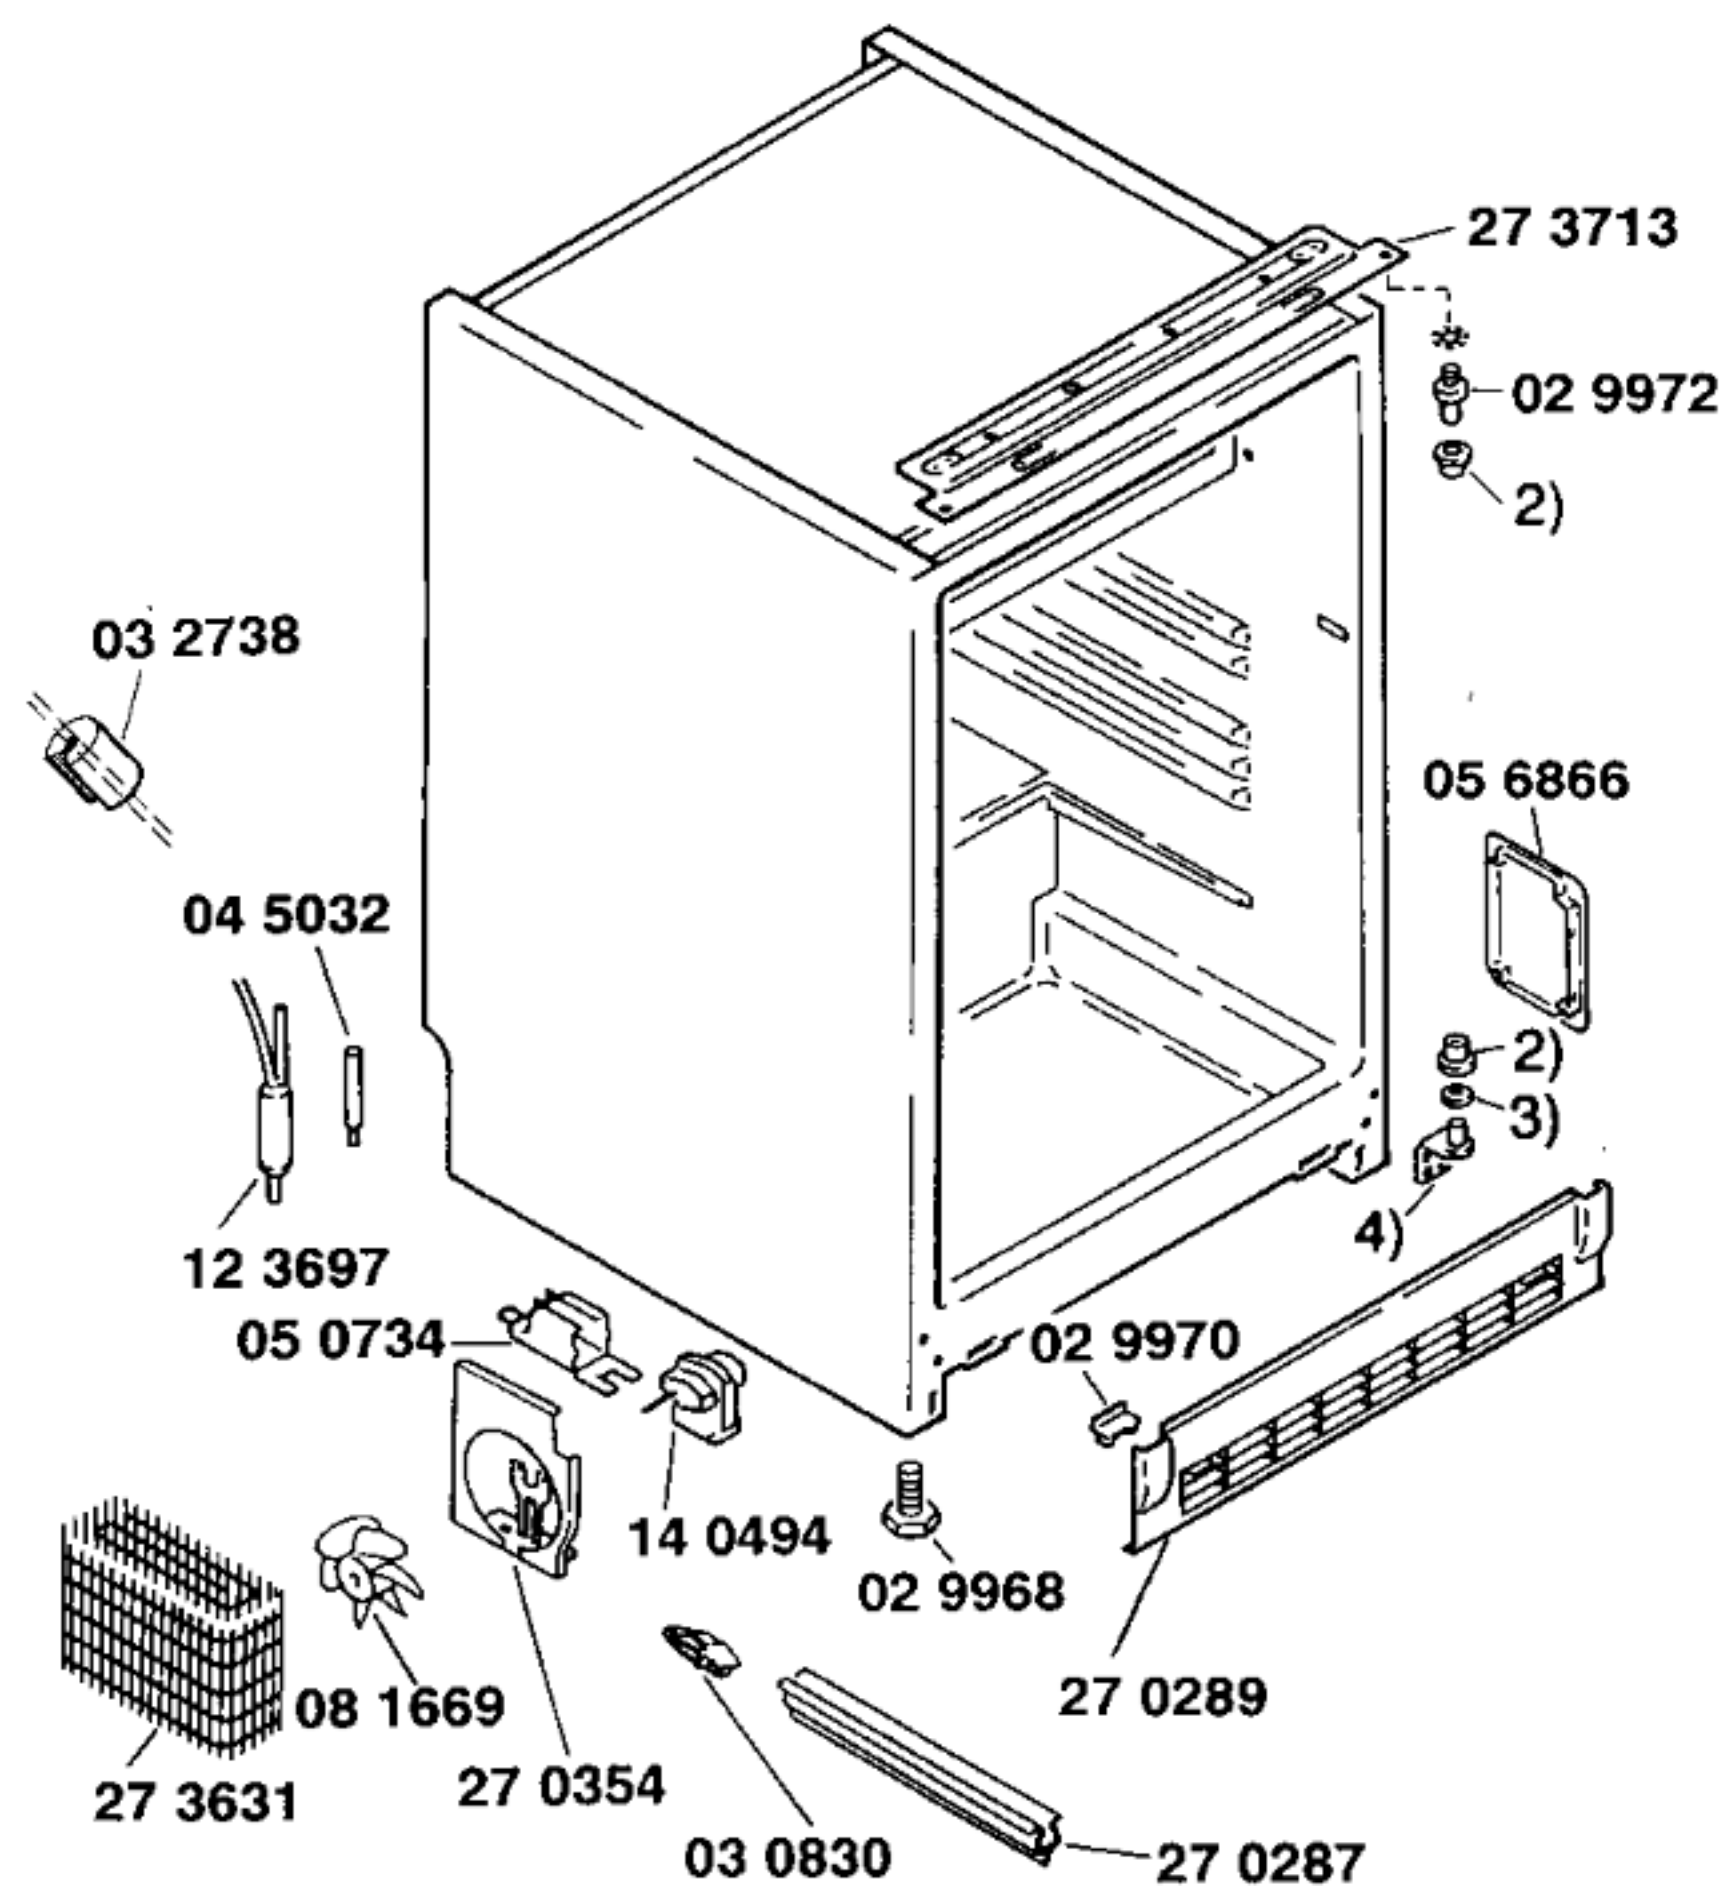


51 4330
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)
51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)

2) 01 9257
3) 02 0605
4) 02 9971


Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0

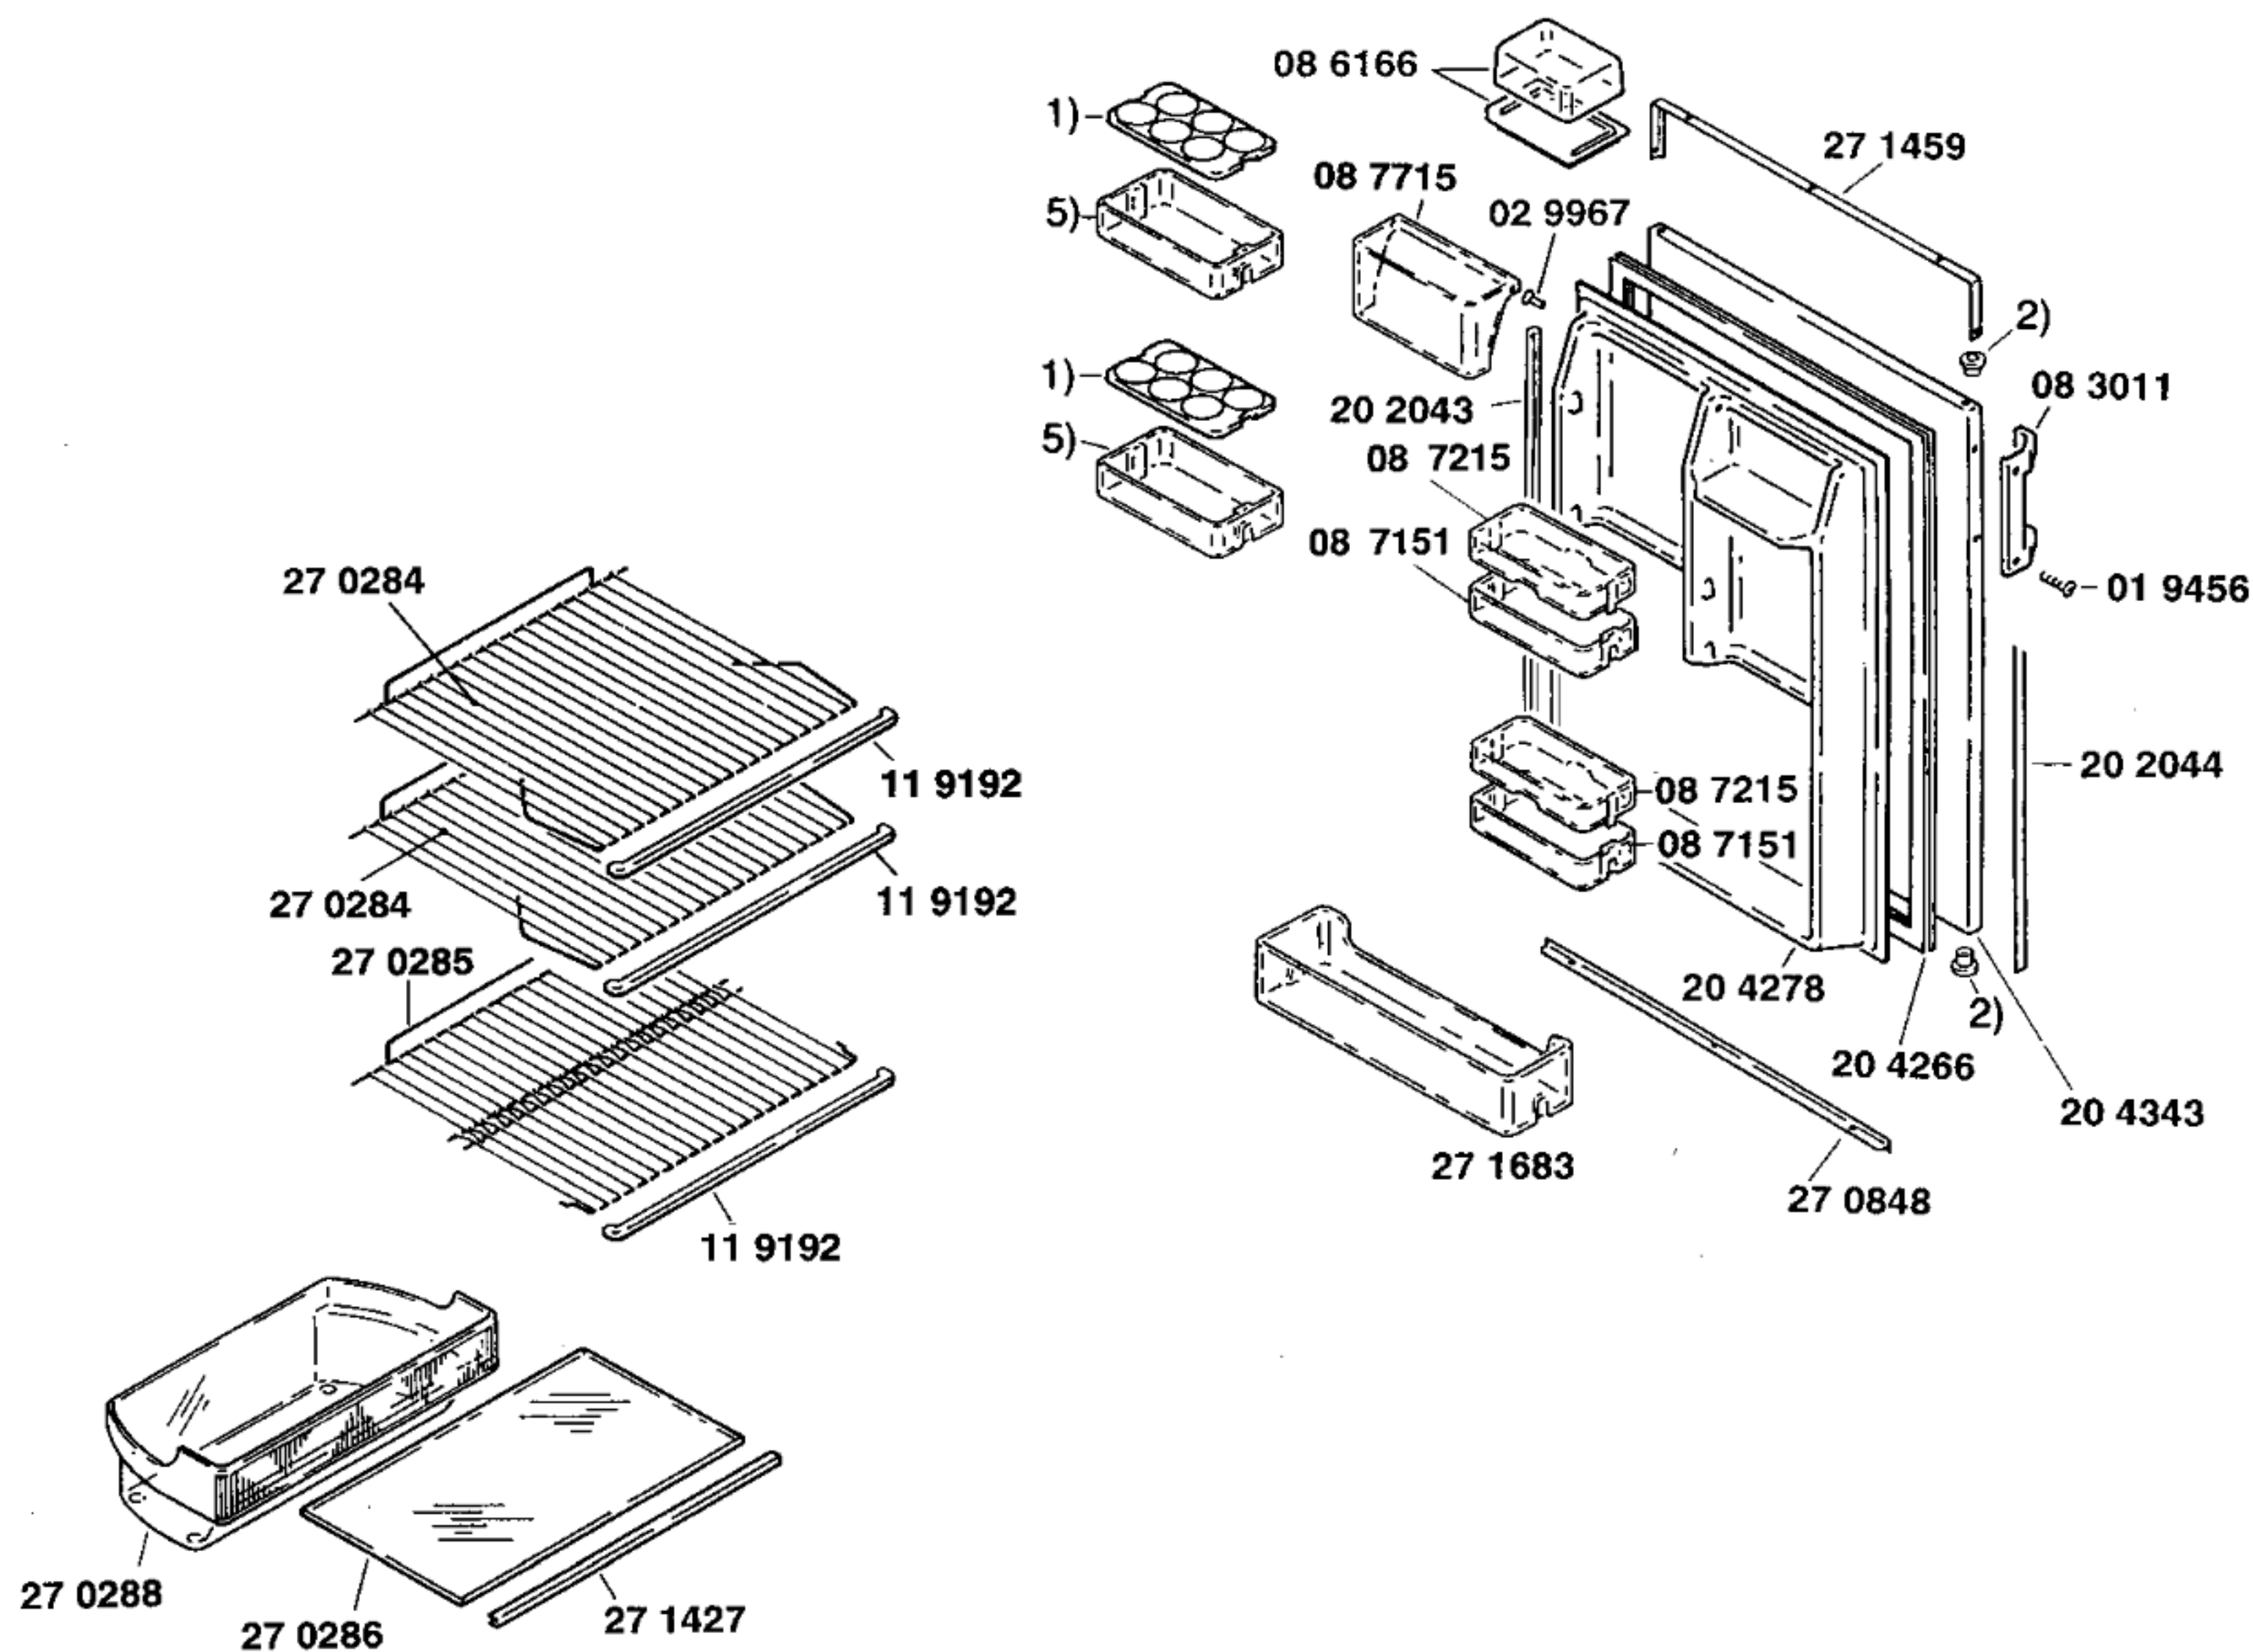

- 1) 08 5589
- 2) 01 9257
- 5) 08 7716

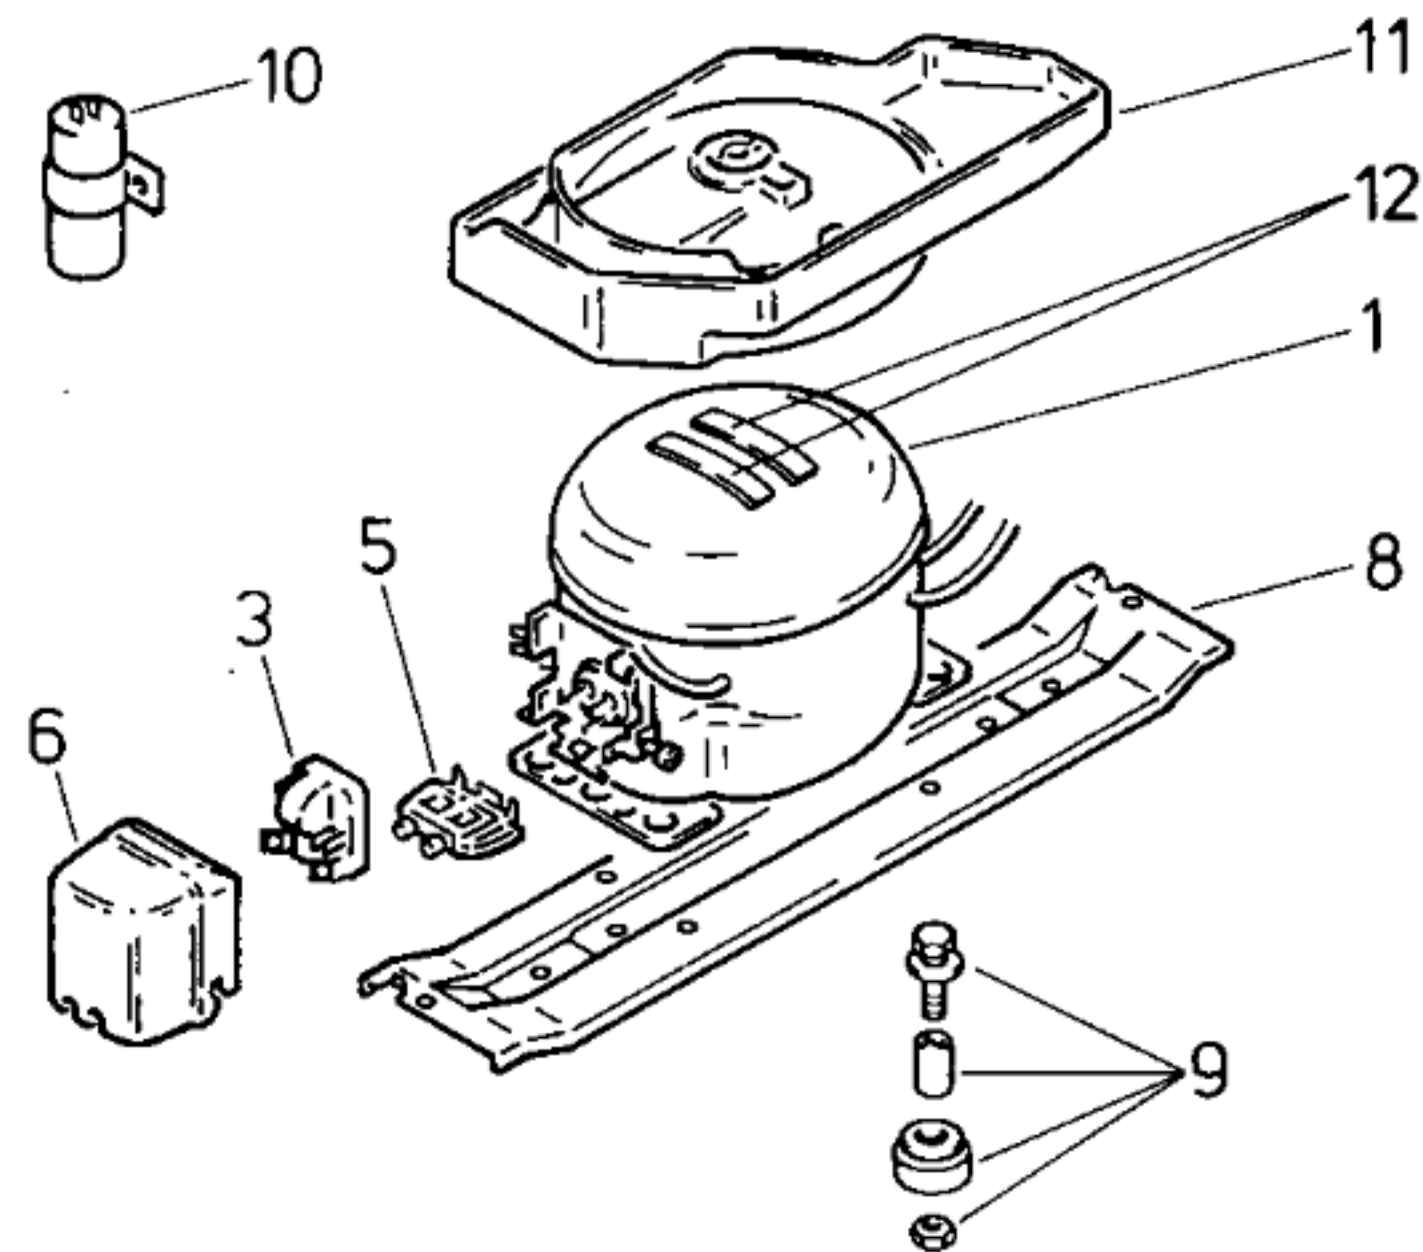

Pos.	EU1	EU2	
	Danfoss TL 4 A	Matsushita S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit		l/h	695	641
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	5,7
Widerstand/Resistance/Résistance		Ha/main/prin.	23,4	24,4
		Hi/aux	15,5	39,8
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 F1		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	+ 5,0	+ 5,0
		„aus“ („abtauen“ od.)	- 27	- 12
Füllmenge/Fill.quantity/Charge		R12	g	70
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		