






07 4445

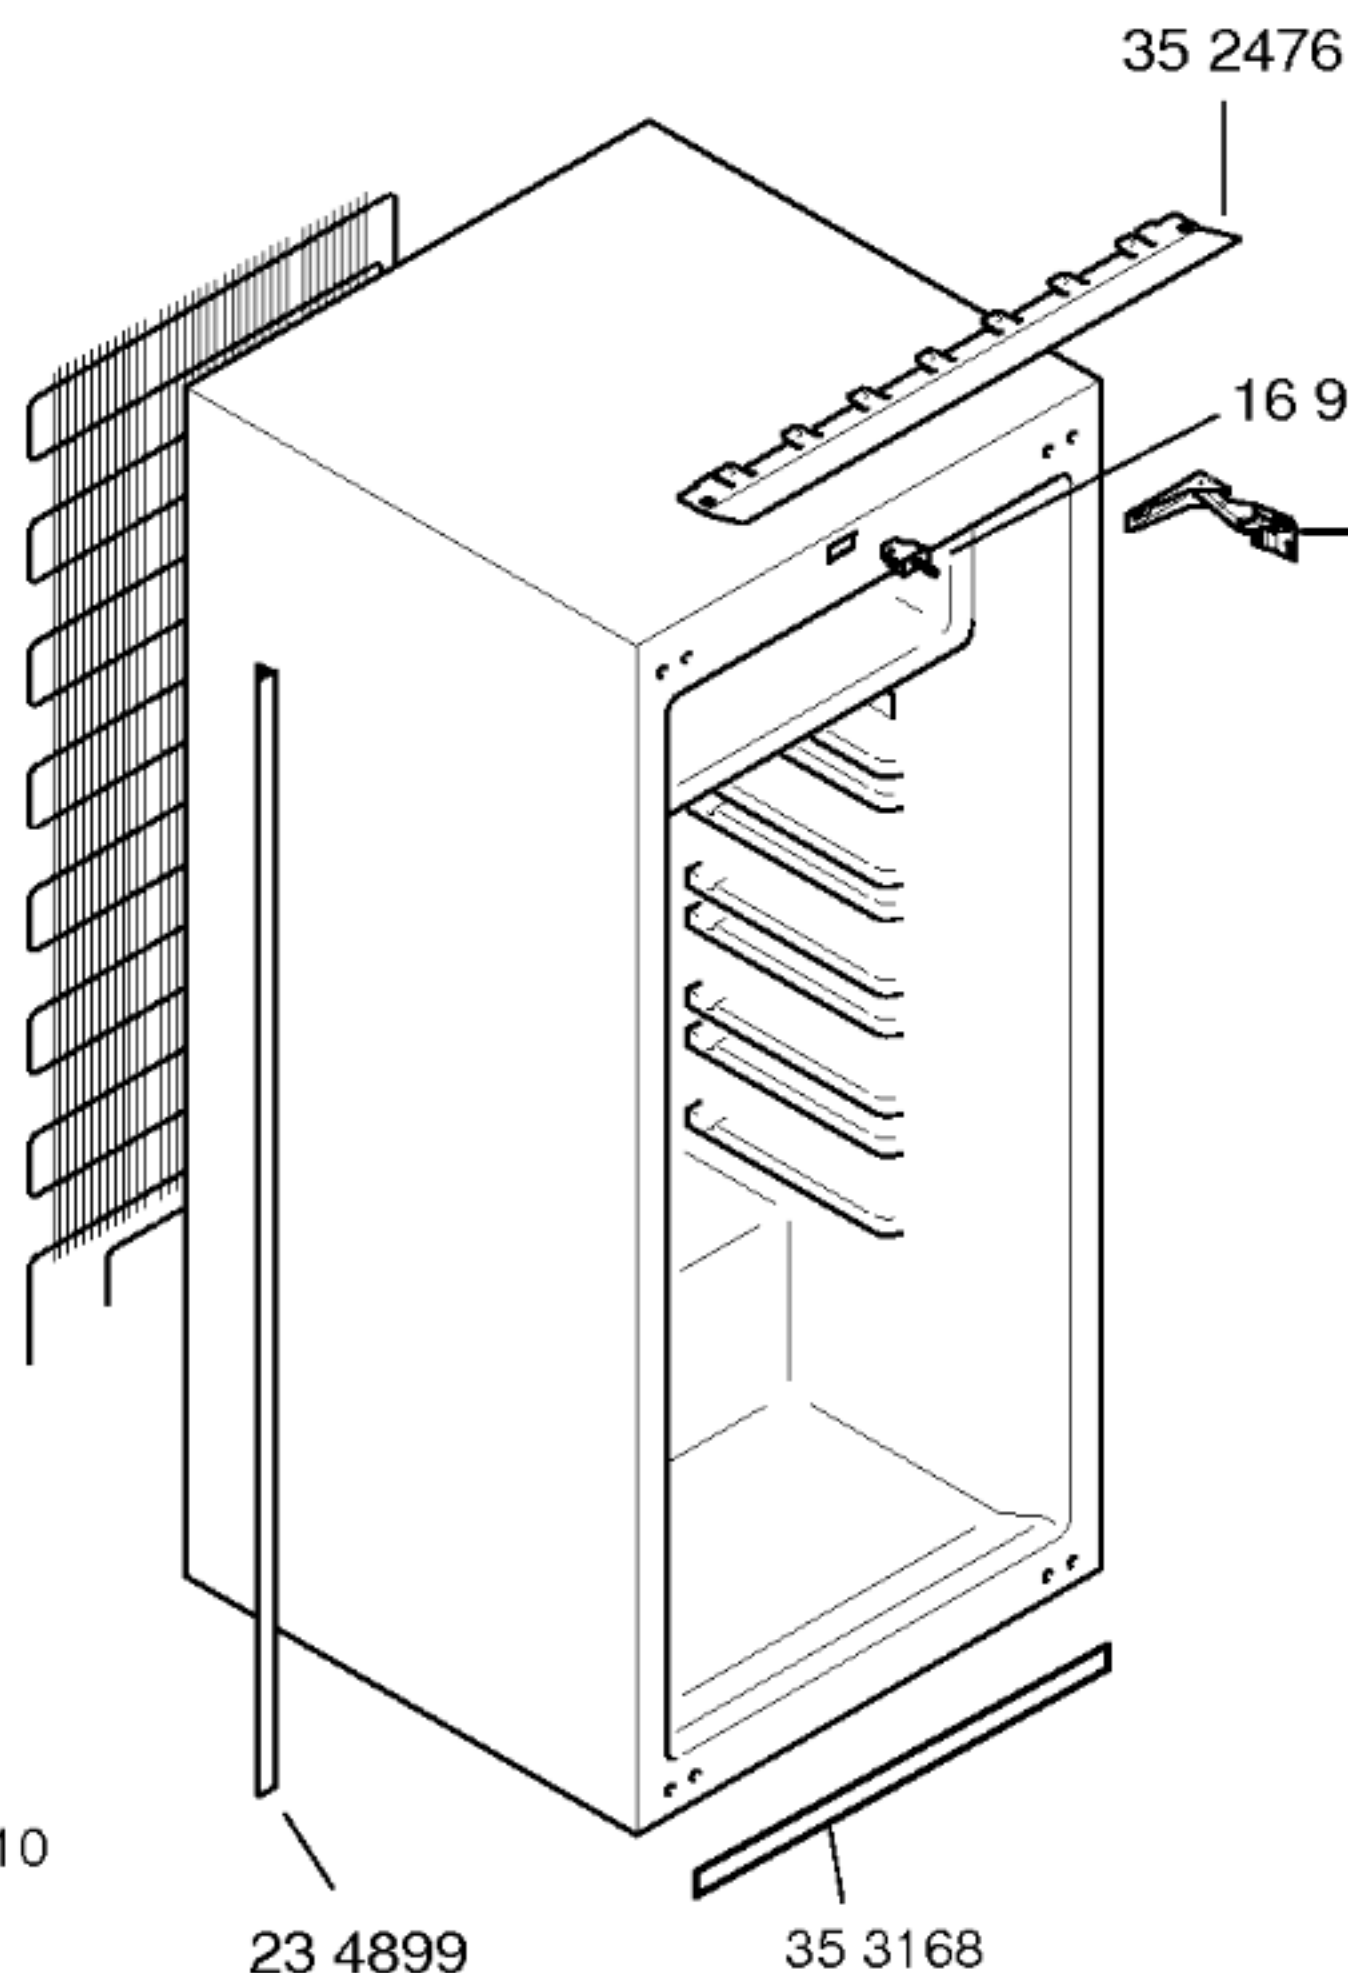

16 9300

48 1572
Set

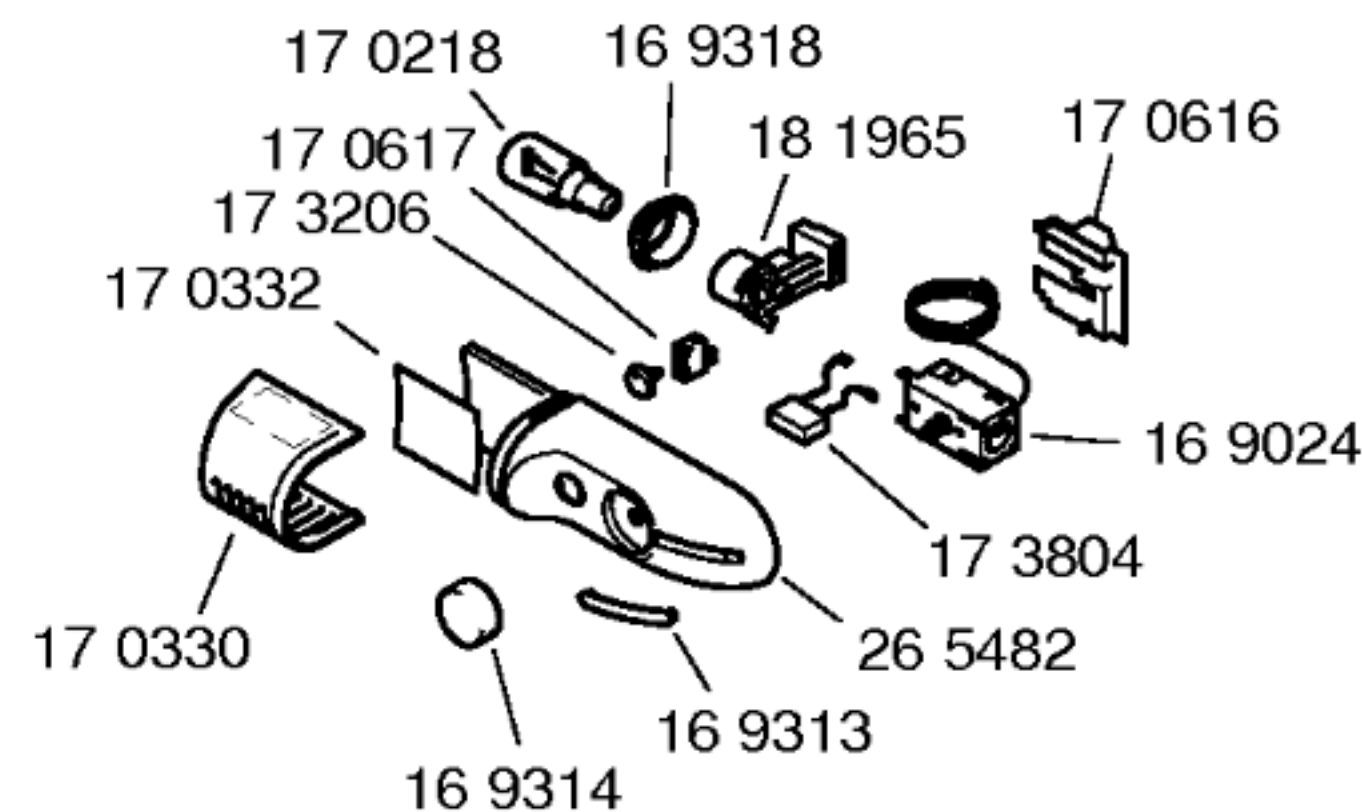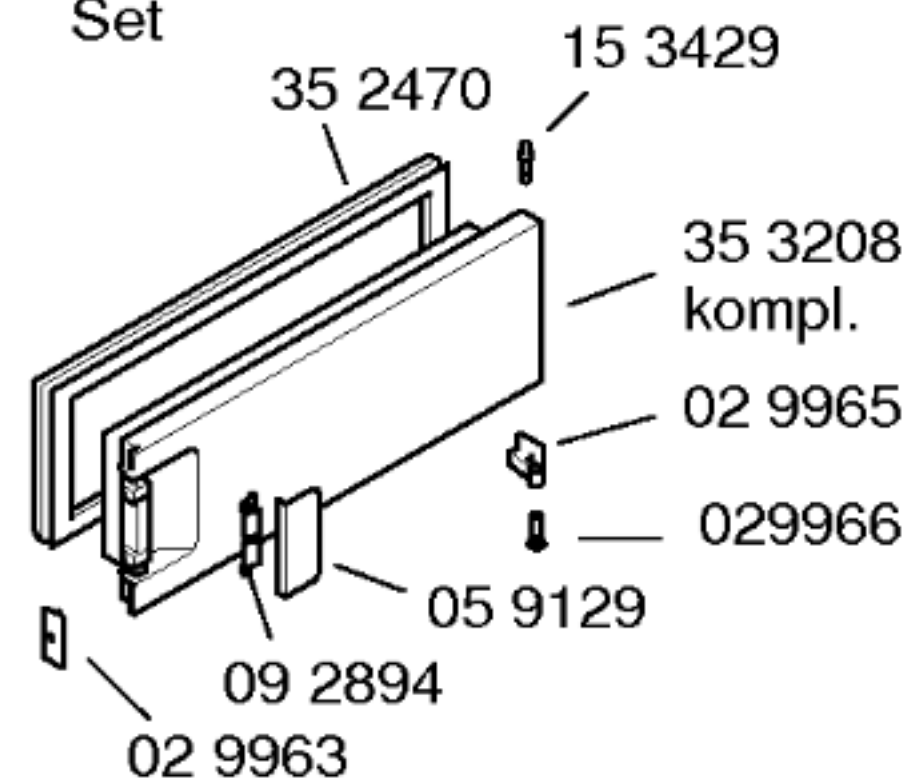


09 3110



Gebrauchsanweisung
58 1967
(de,en,fr,it,nl,da,no,fi
sv)
58 1968
(it,es,pt,el)

Montageanleitung
52 3227
(de,en,fr,ti,nl,da,no,
fi,sv,tr)

Beistellsatz
26 6056

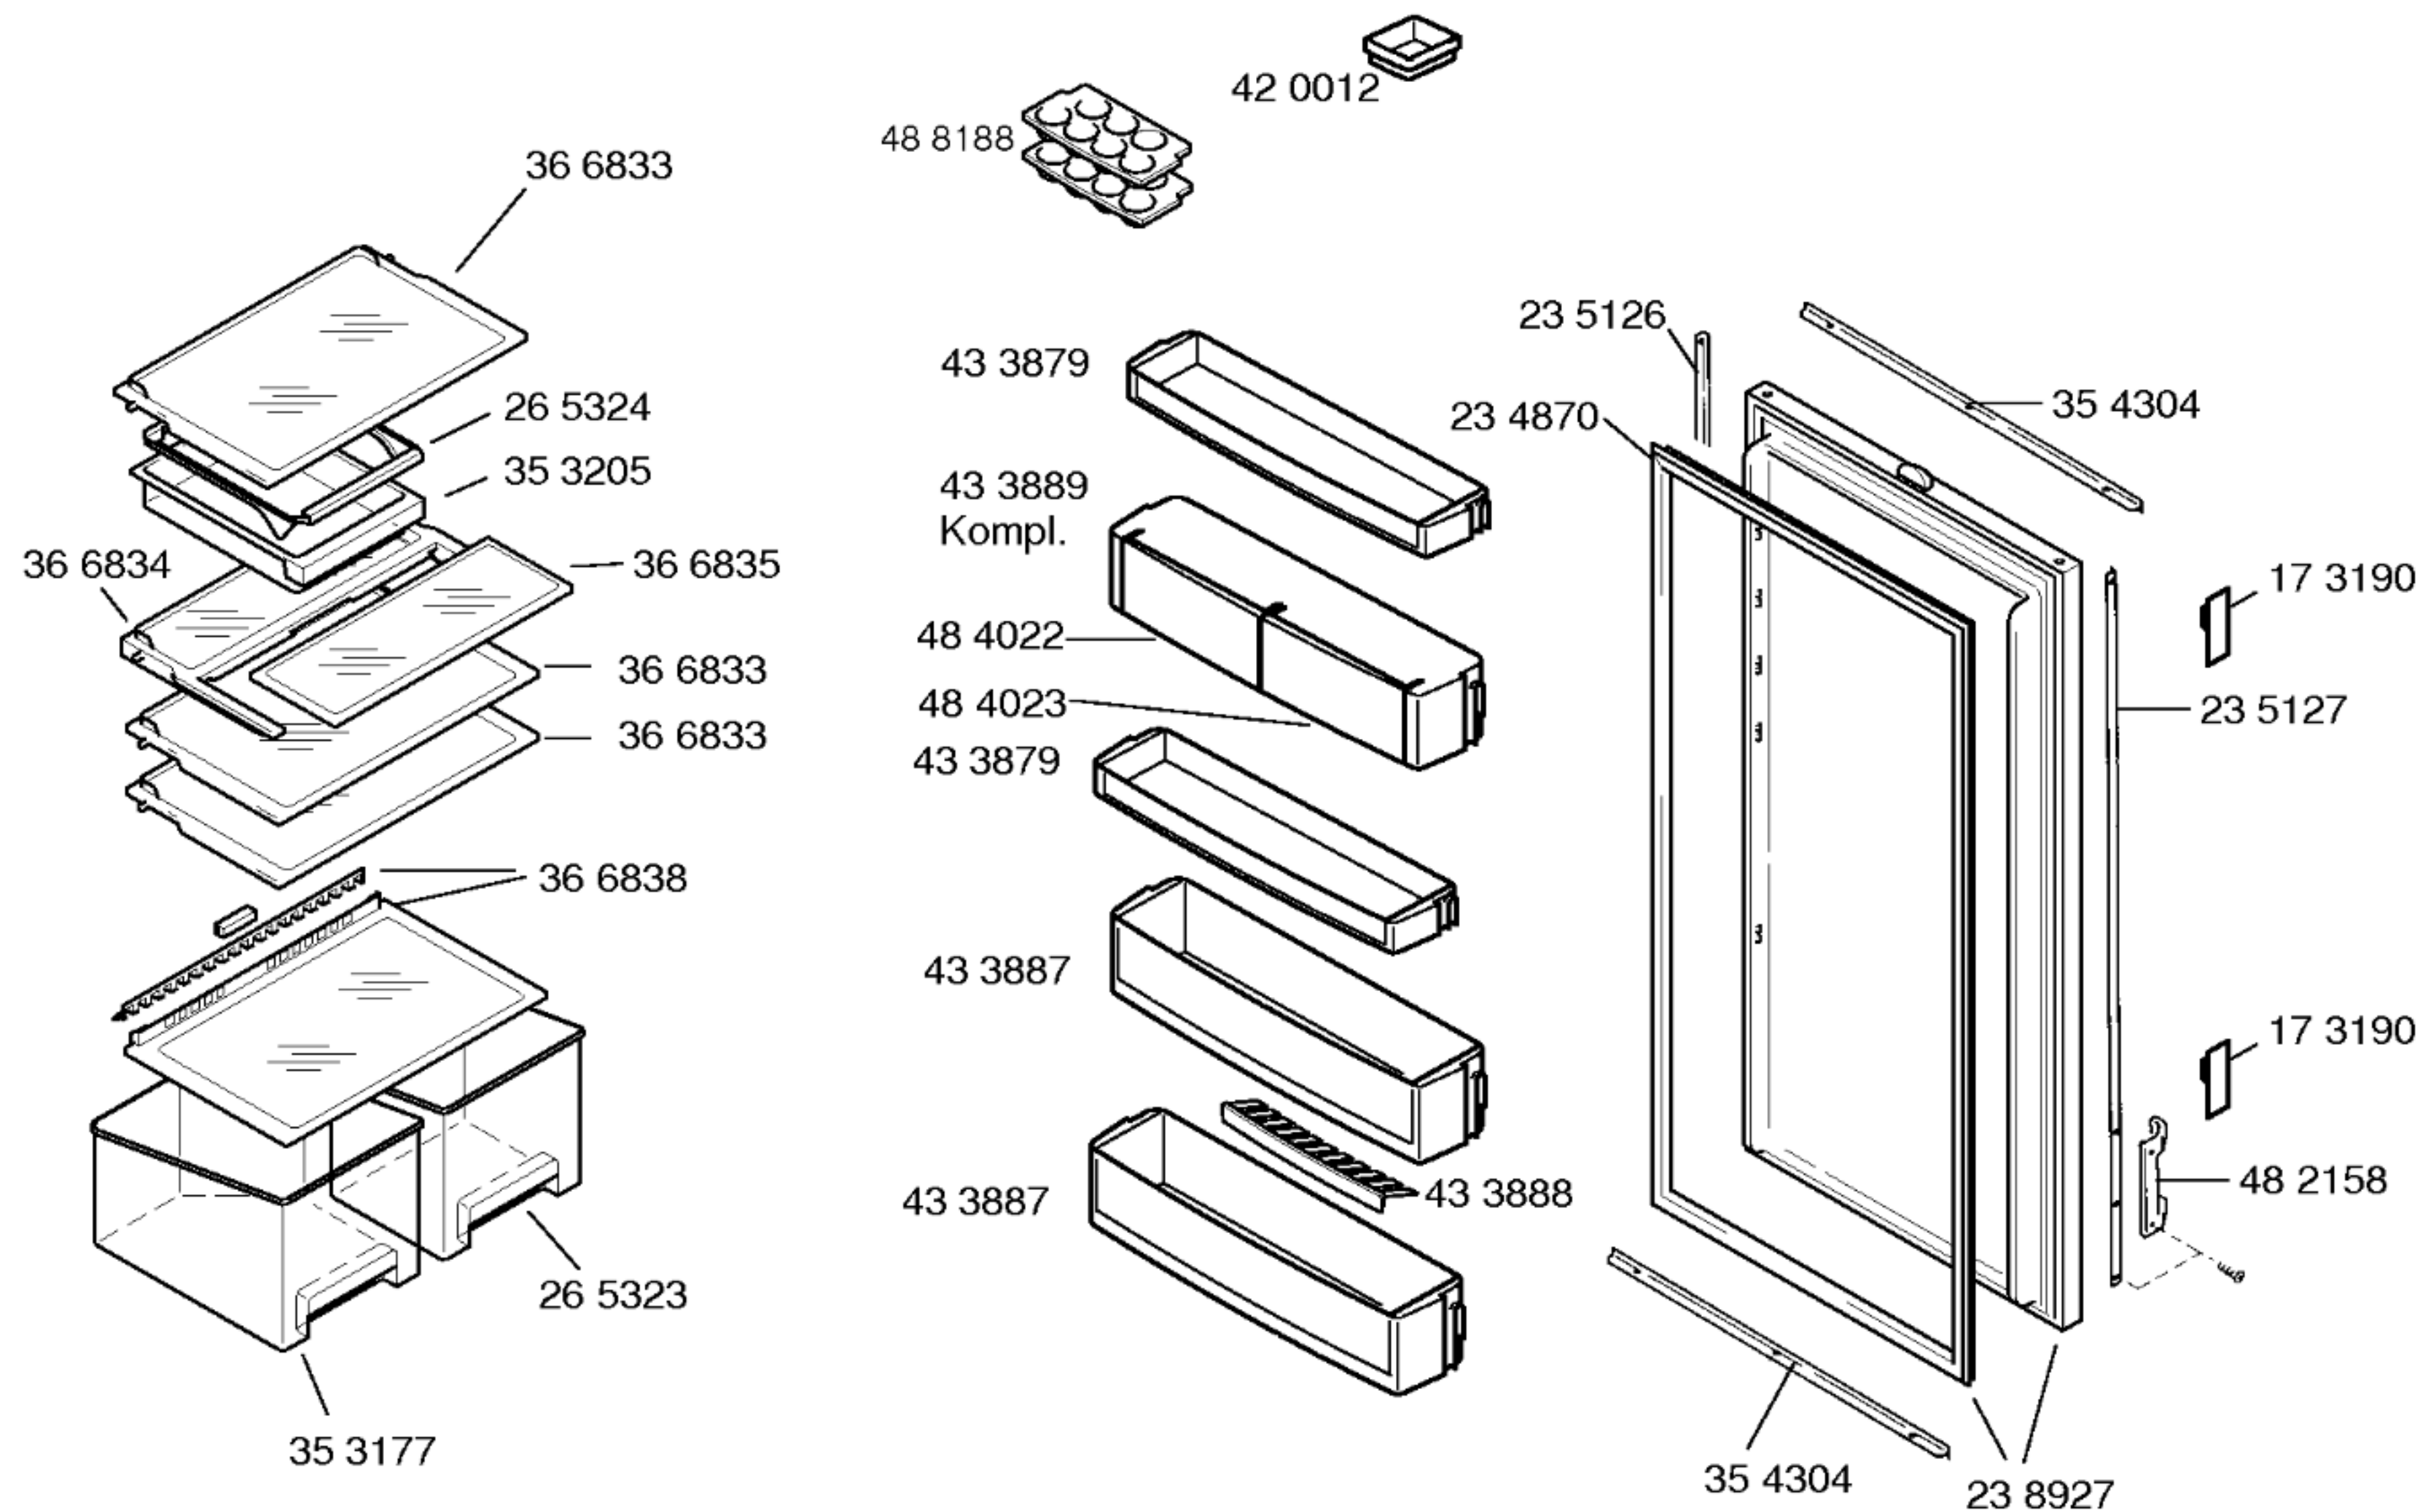Ausgleichsblenden
braun

KSZ1288 37mm

KSZ1289 41mm

KSZ1280 57mm

ALU

KSZ1281 37mm

KSZ1282 41mm

KSZ1283 57mm

Dekorrahmen
braun


KZ12480 1225mm

Türverkleidung
Edelstahl

KZ11232 Griff re. 1225mm

KZ11233 Griff li.

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

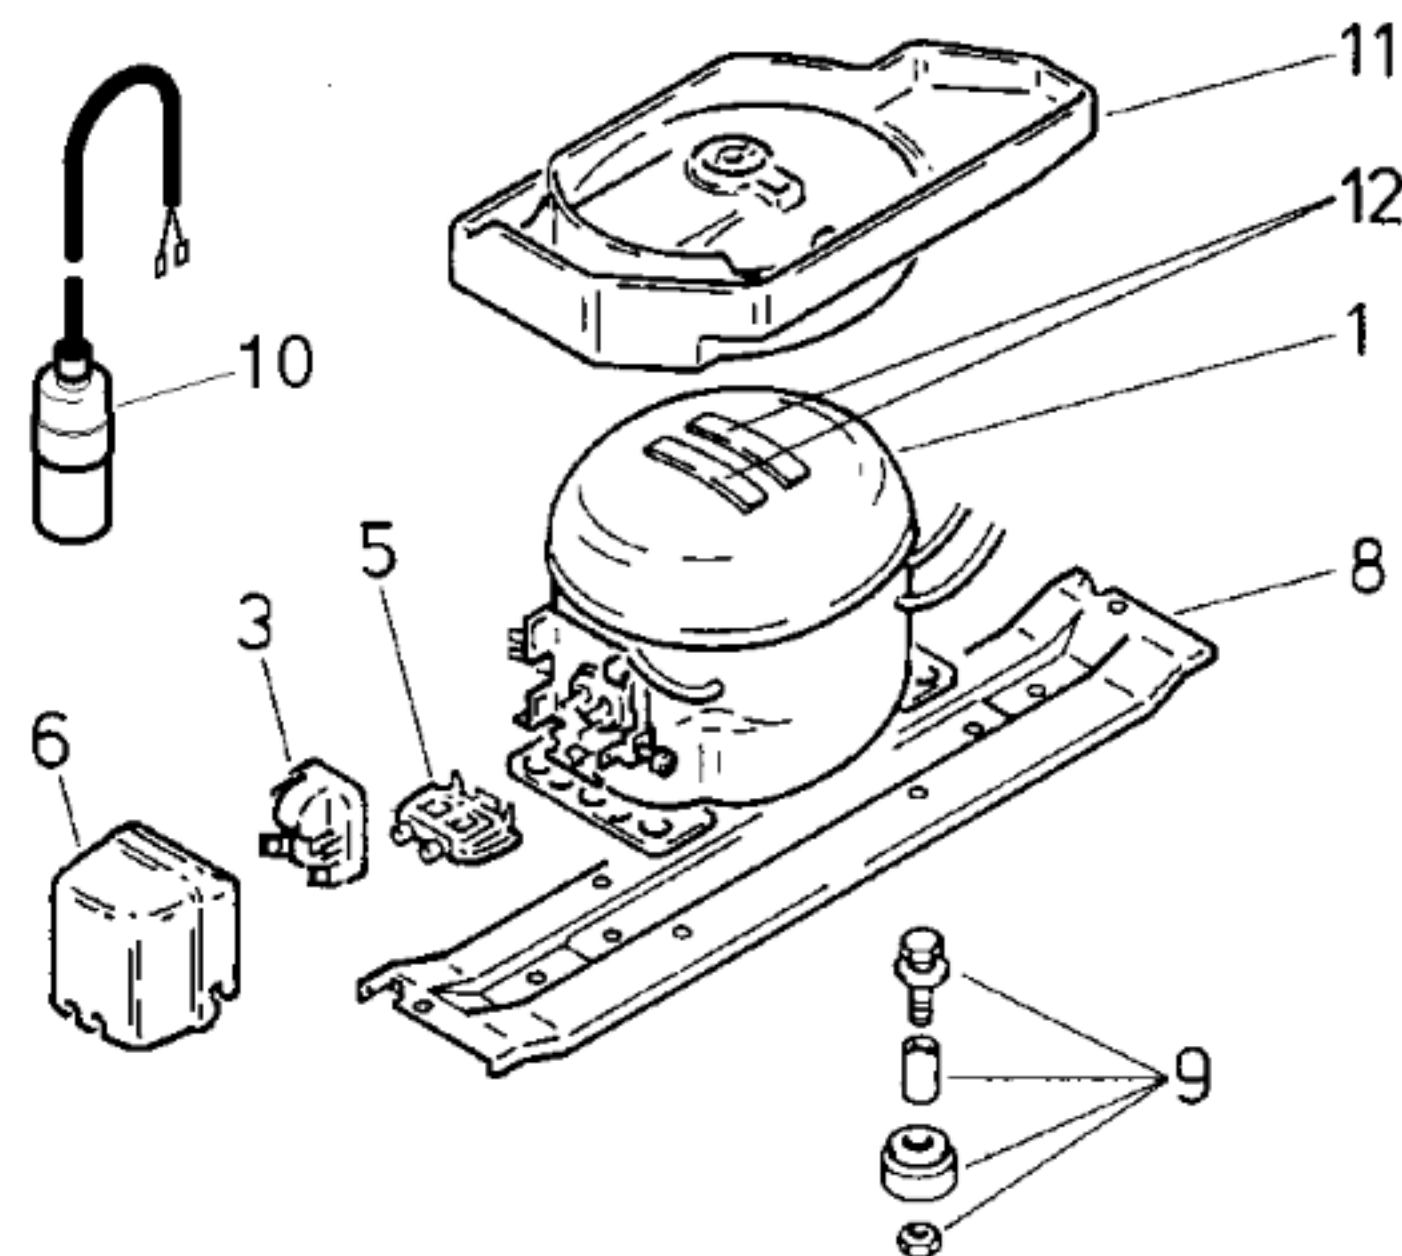

Pos.	V01		
	Danfoss		
	TLY 7KK2		
1	14 2059		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7	16 9319		
8	26 4879		
9	0 50166		
10			
11	36 5099		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLY7KK2		
Förderleistung/Delivery/Débit		l/h	1168	
Anlaufstrom/Starting current/Cour de démarrage		A	5,7	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	27,1	
		Hi/aux Ω	27,2	
Temp.-Regler/Thermostat		Ranco		
Typ/Type				
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	+4,0	+4,0
Valeurs de commutation		„aus“	-32,0	-12,0
		(„abtauen“ od.) „alarm“		
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	71	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild