




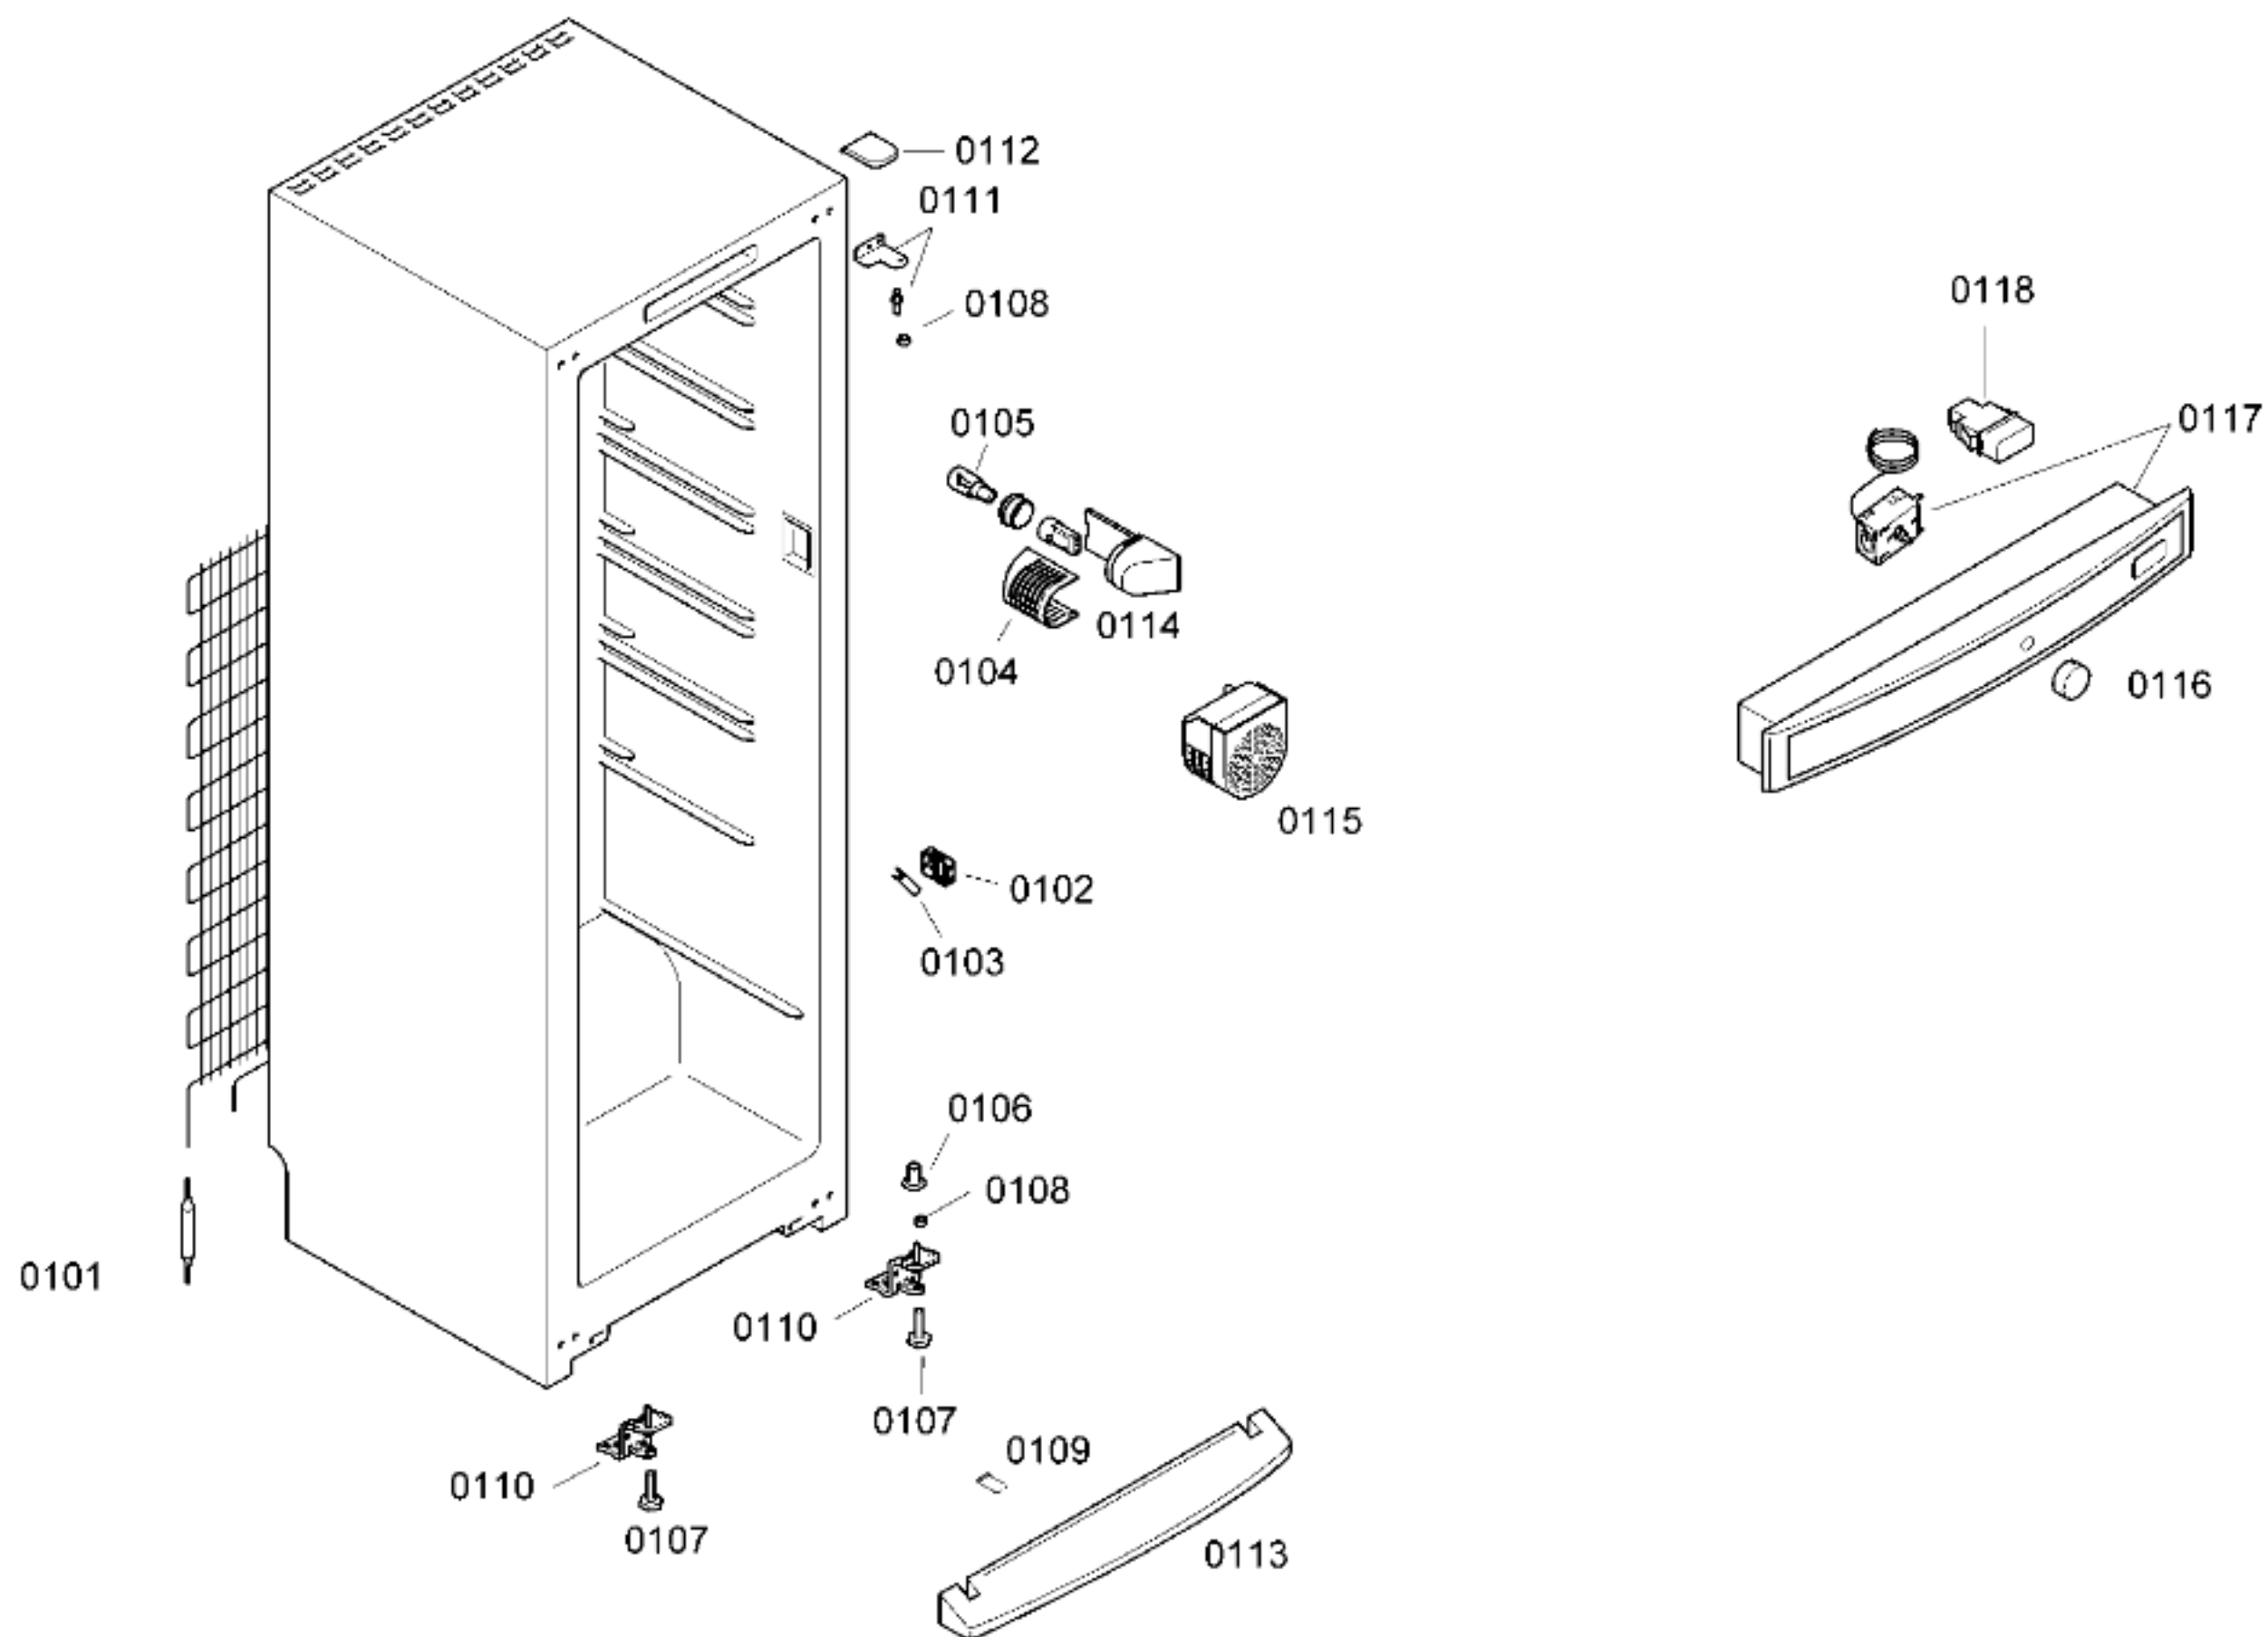

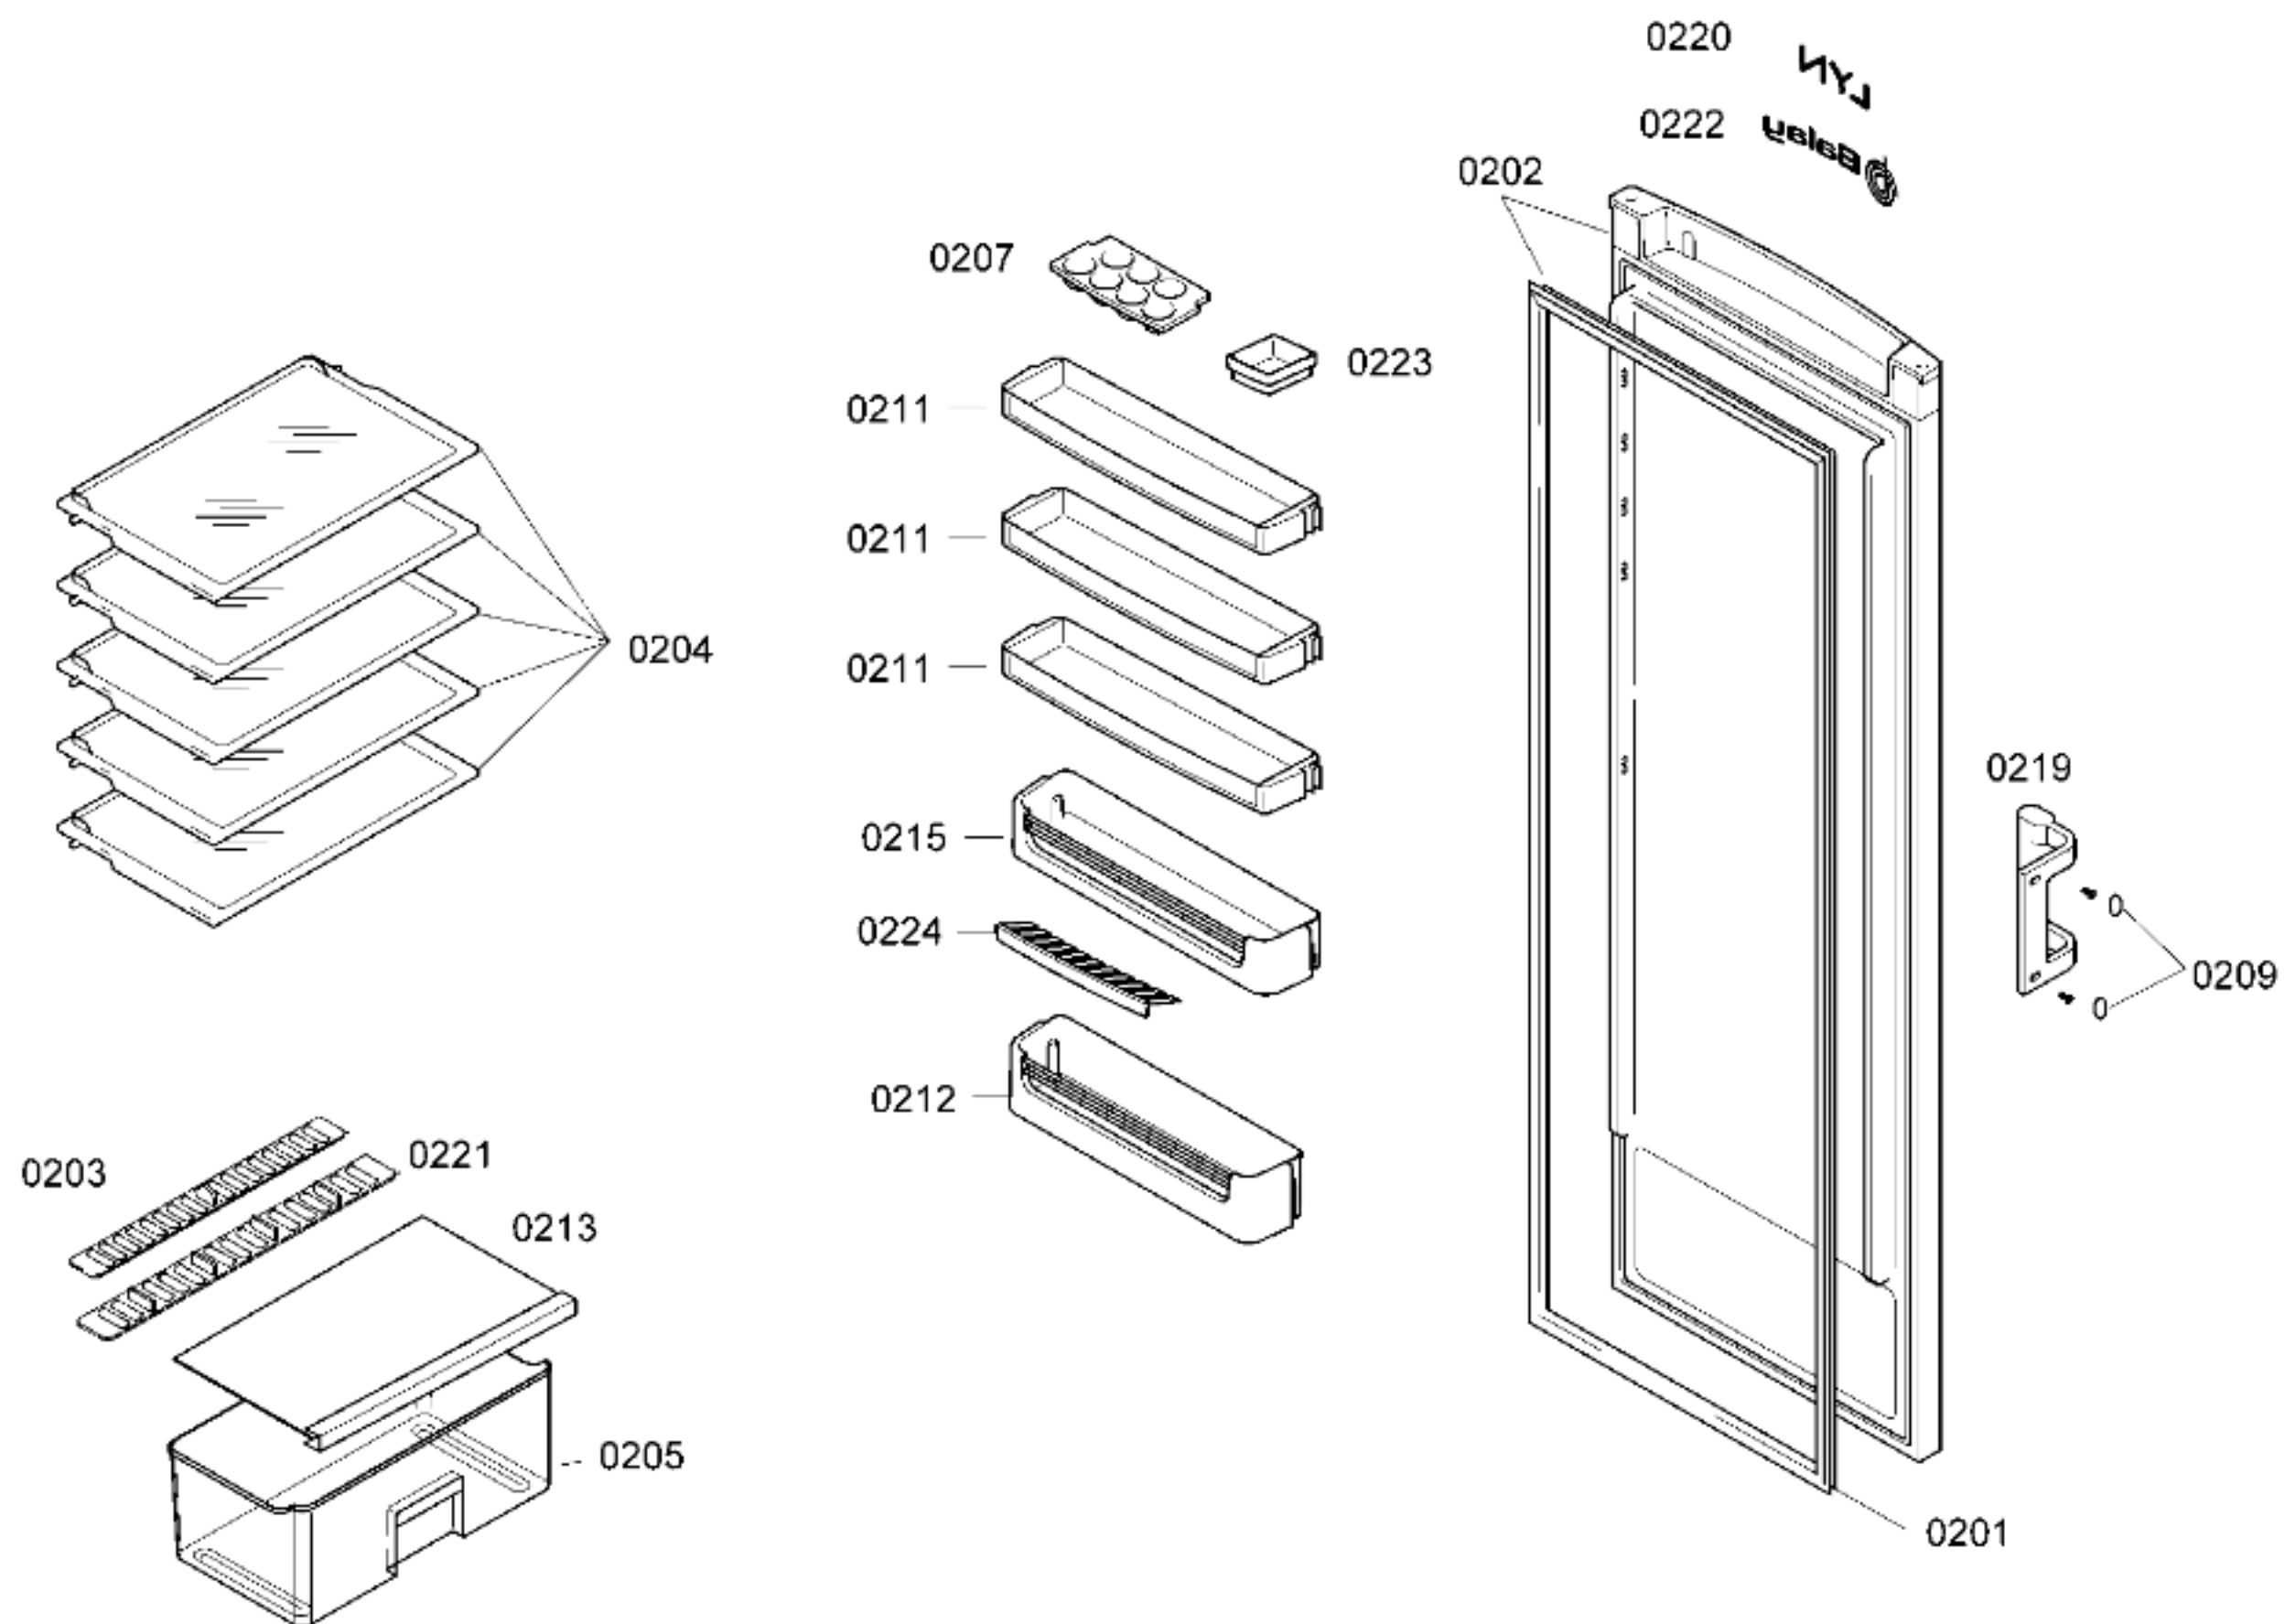

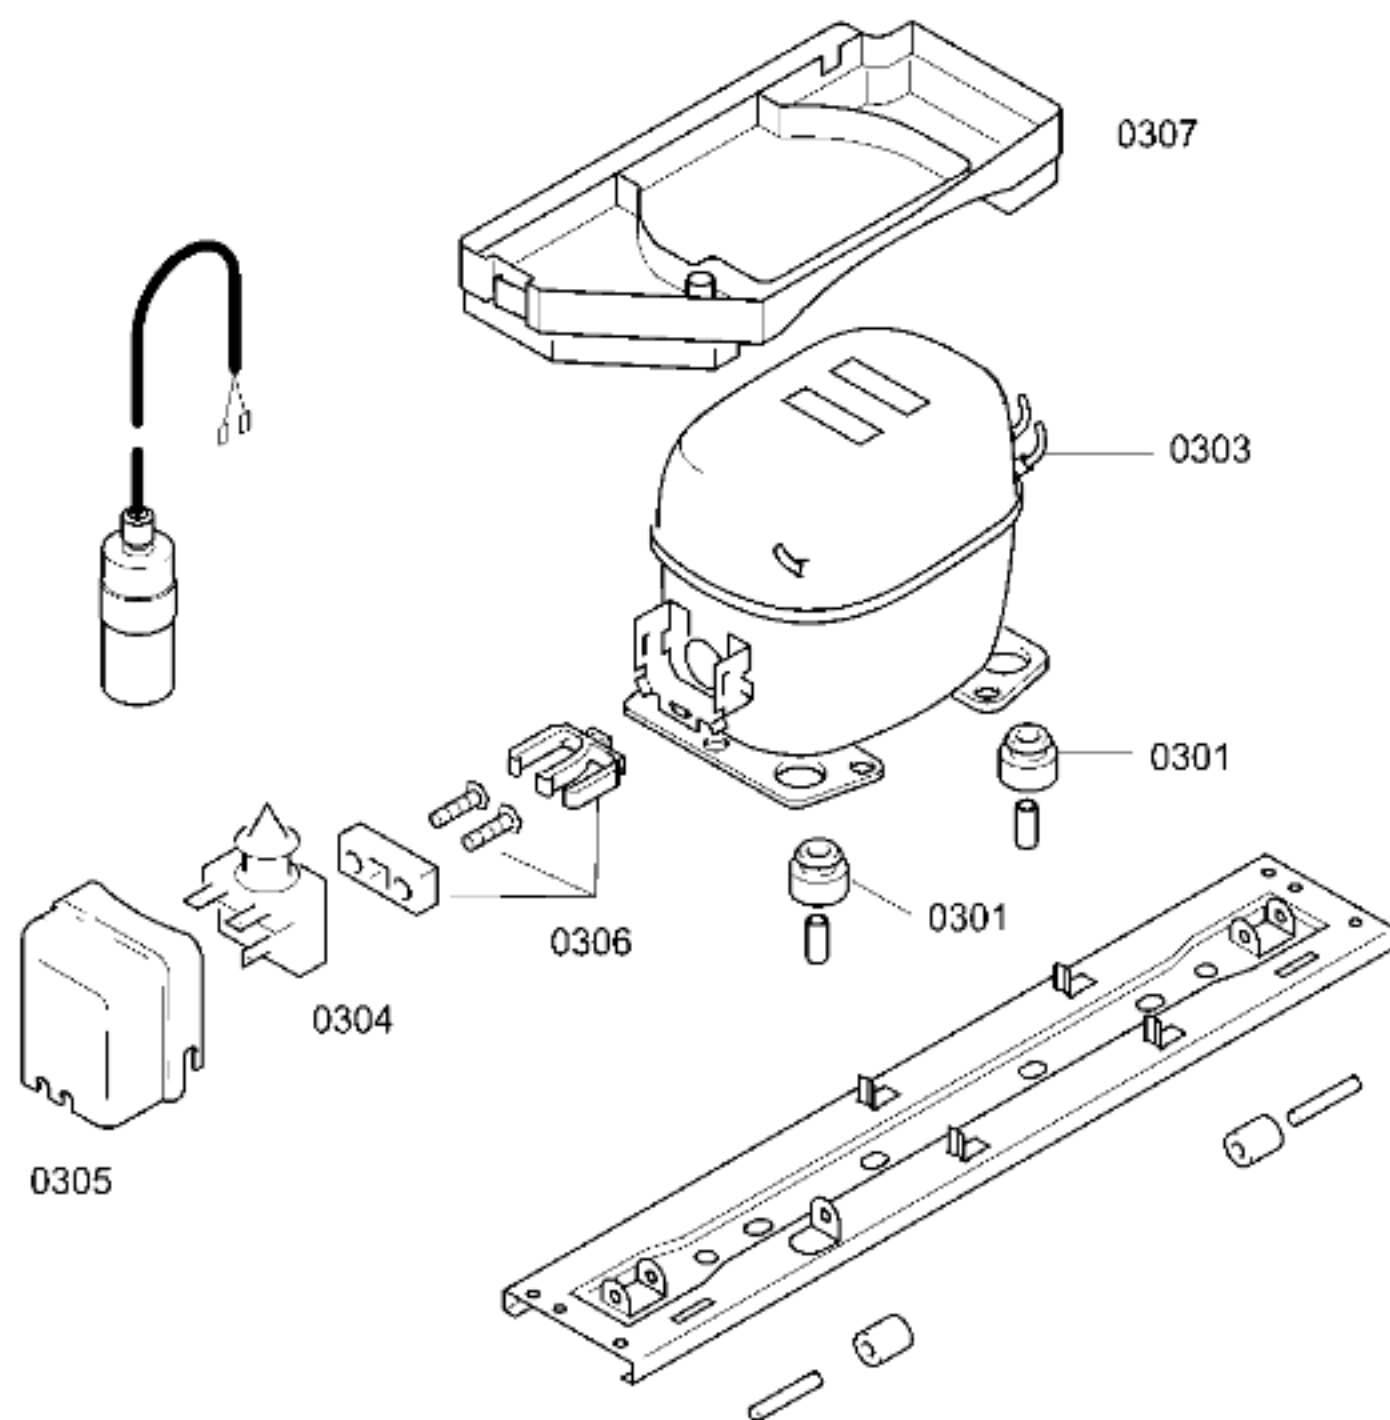

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Goldstar		
Typ/Type		NDA69NAEM		
Förderleistung/Delivery/Débit		0320		
Anlaufstrom/Starting current/Cour de démarrage		A		
Widerstand/Resistance/Résistance		Ω		
Hi/main/prin		Ω		
Hi/aux		Ω		
Temp.-Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values		"warm"		
Valeurs de commutation		"kalt"		
		"alarm"		
Fullmenge/Fill quantity/Charge				
R600a		*		
Anschlußwert/Conn.load/Puiss. connectée				
W		67		
Heizung/Heater/Chauffage				
Widerstand /Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand /Resistance/Résistance		Ω		
NTC-Fühler / Sensor				
		°C	kΩ	°C
		+10	9,95 ±0,18	-18
		+5	12,70 ±0,18	-22
		0	16,33 ±0,18	-26
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild