




Libro de instrucciones  
51 7394  
(E, P, GB, F, D)

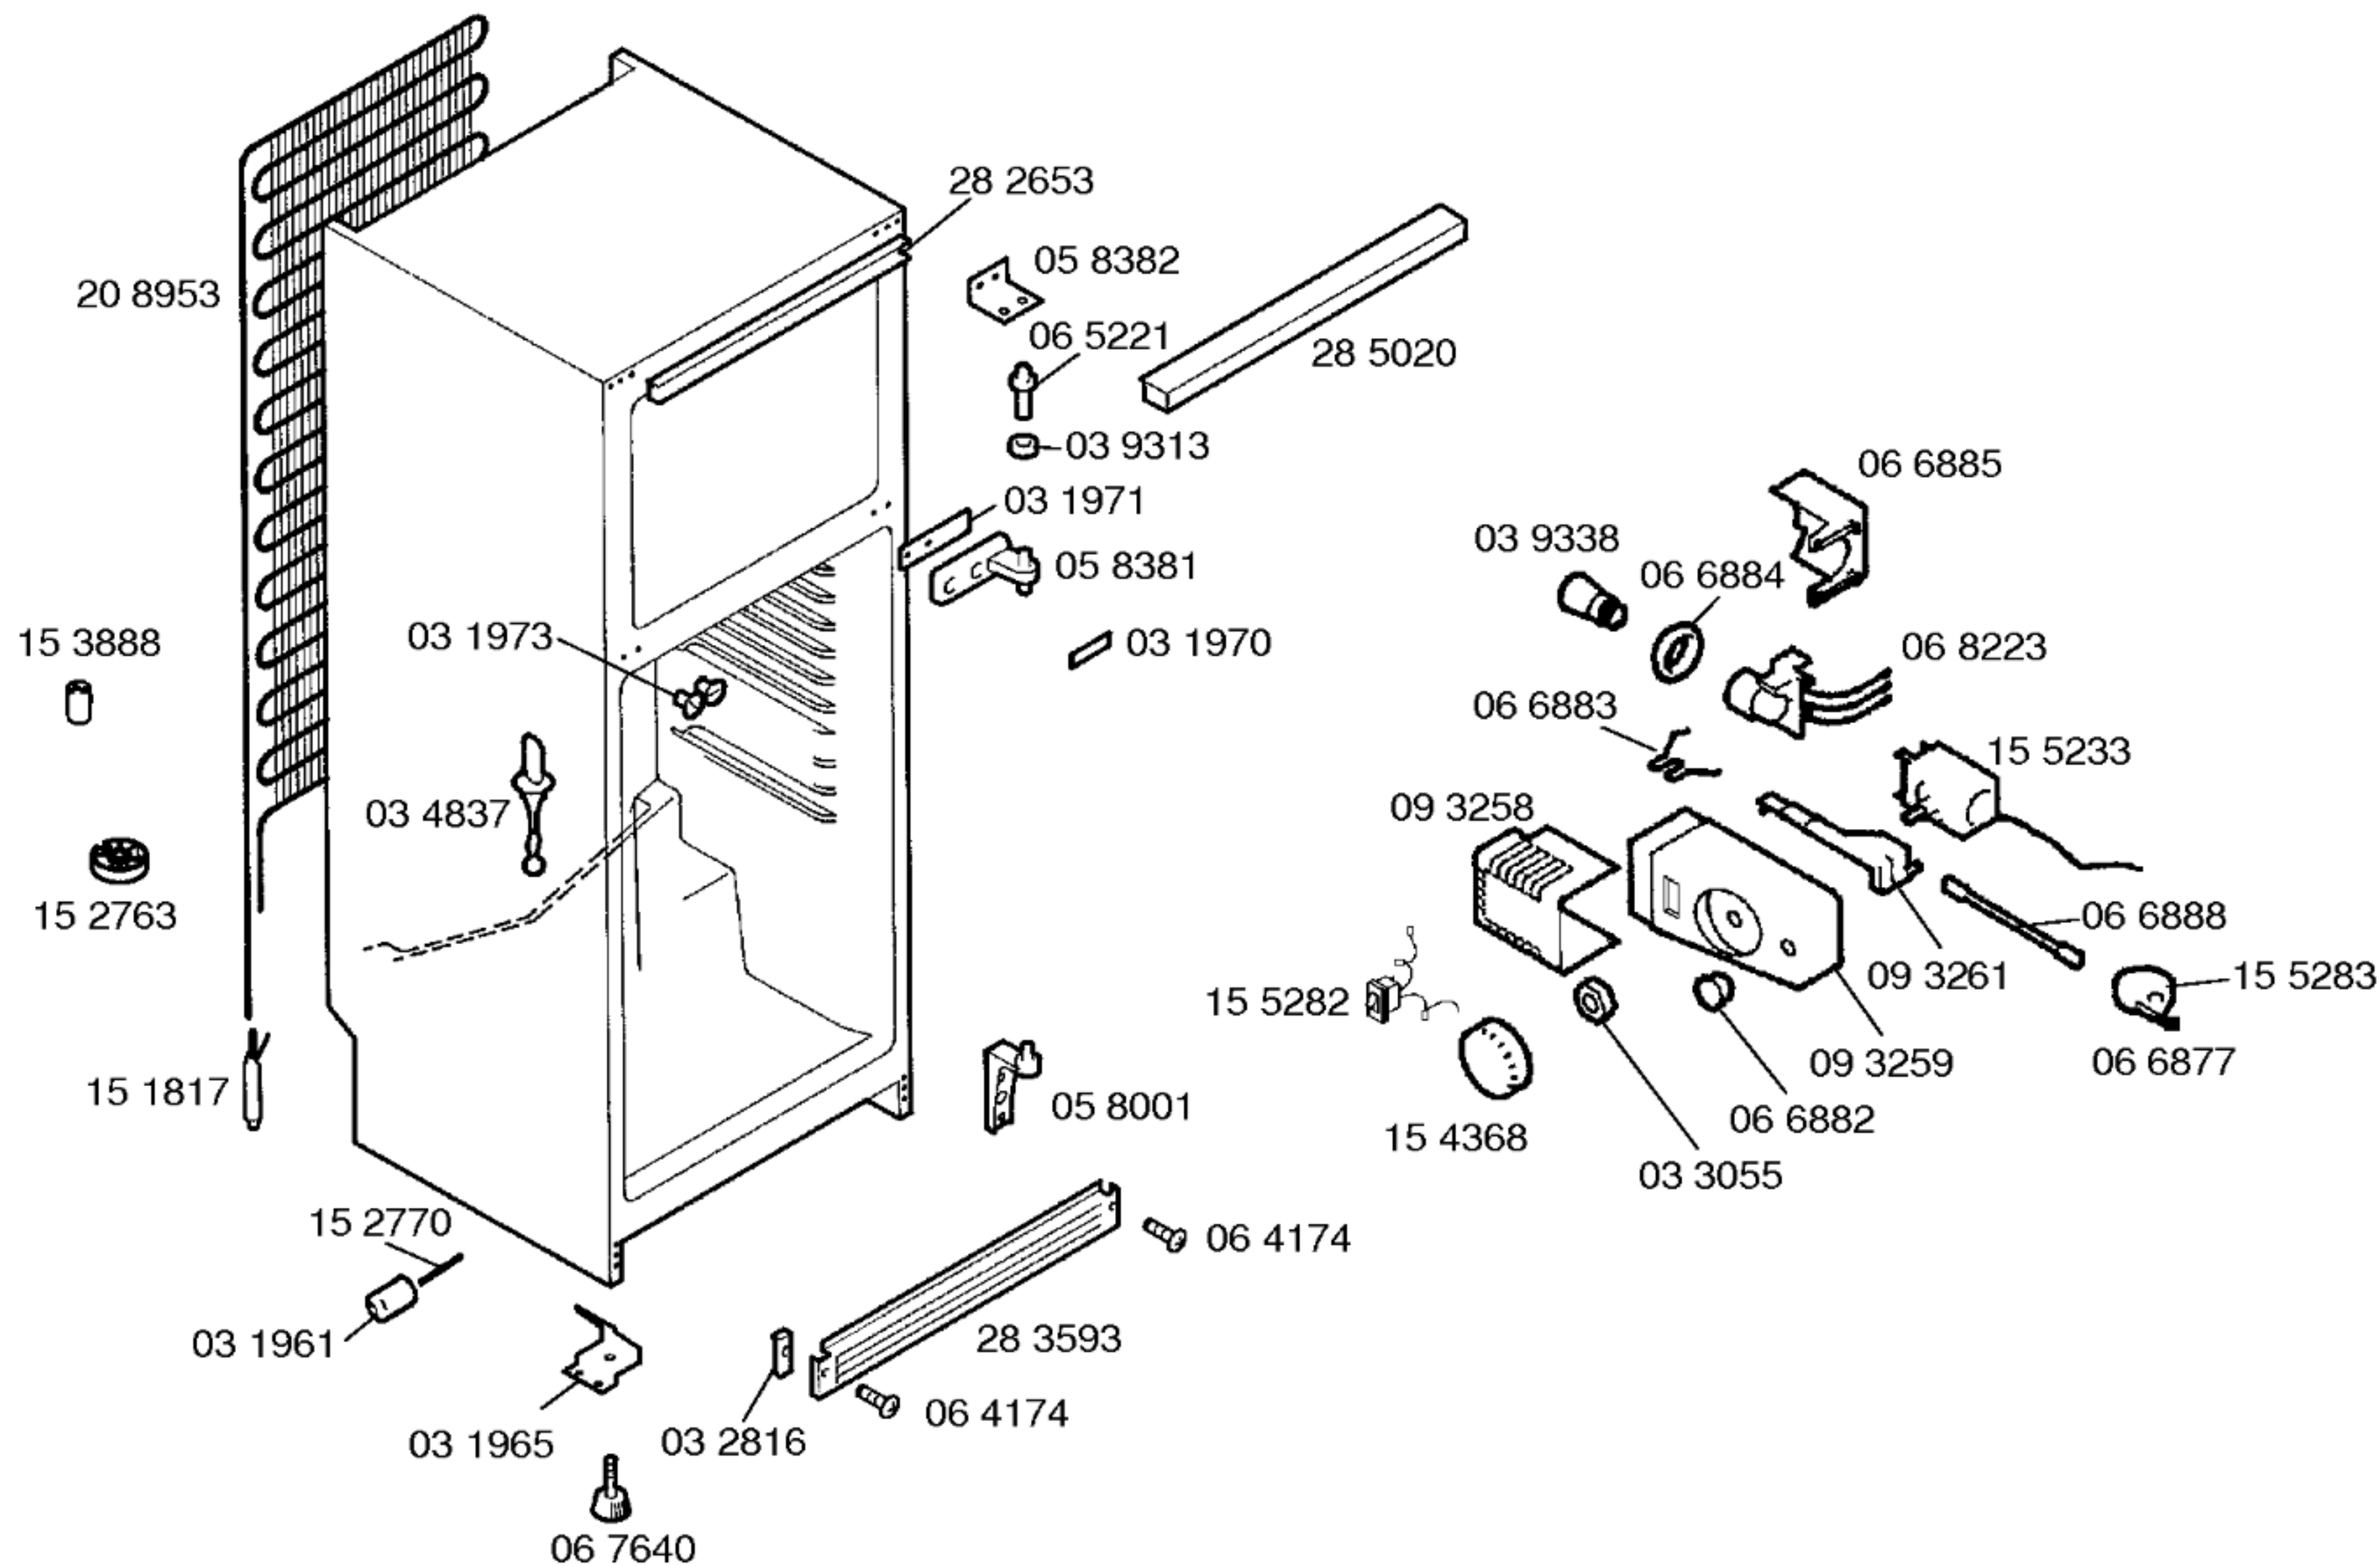

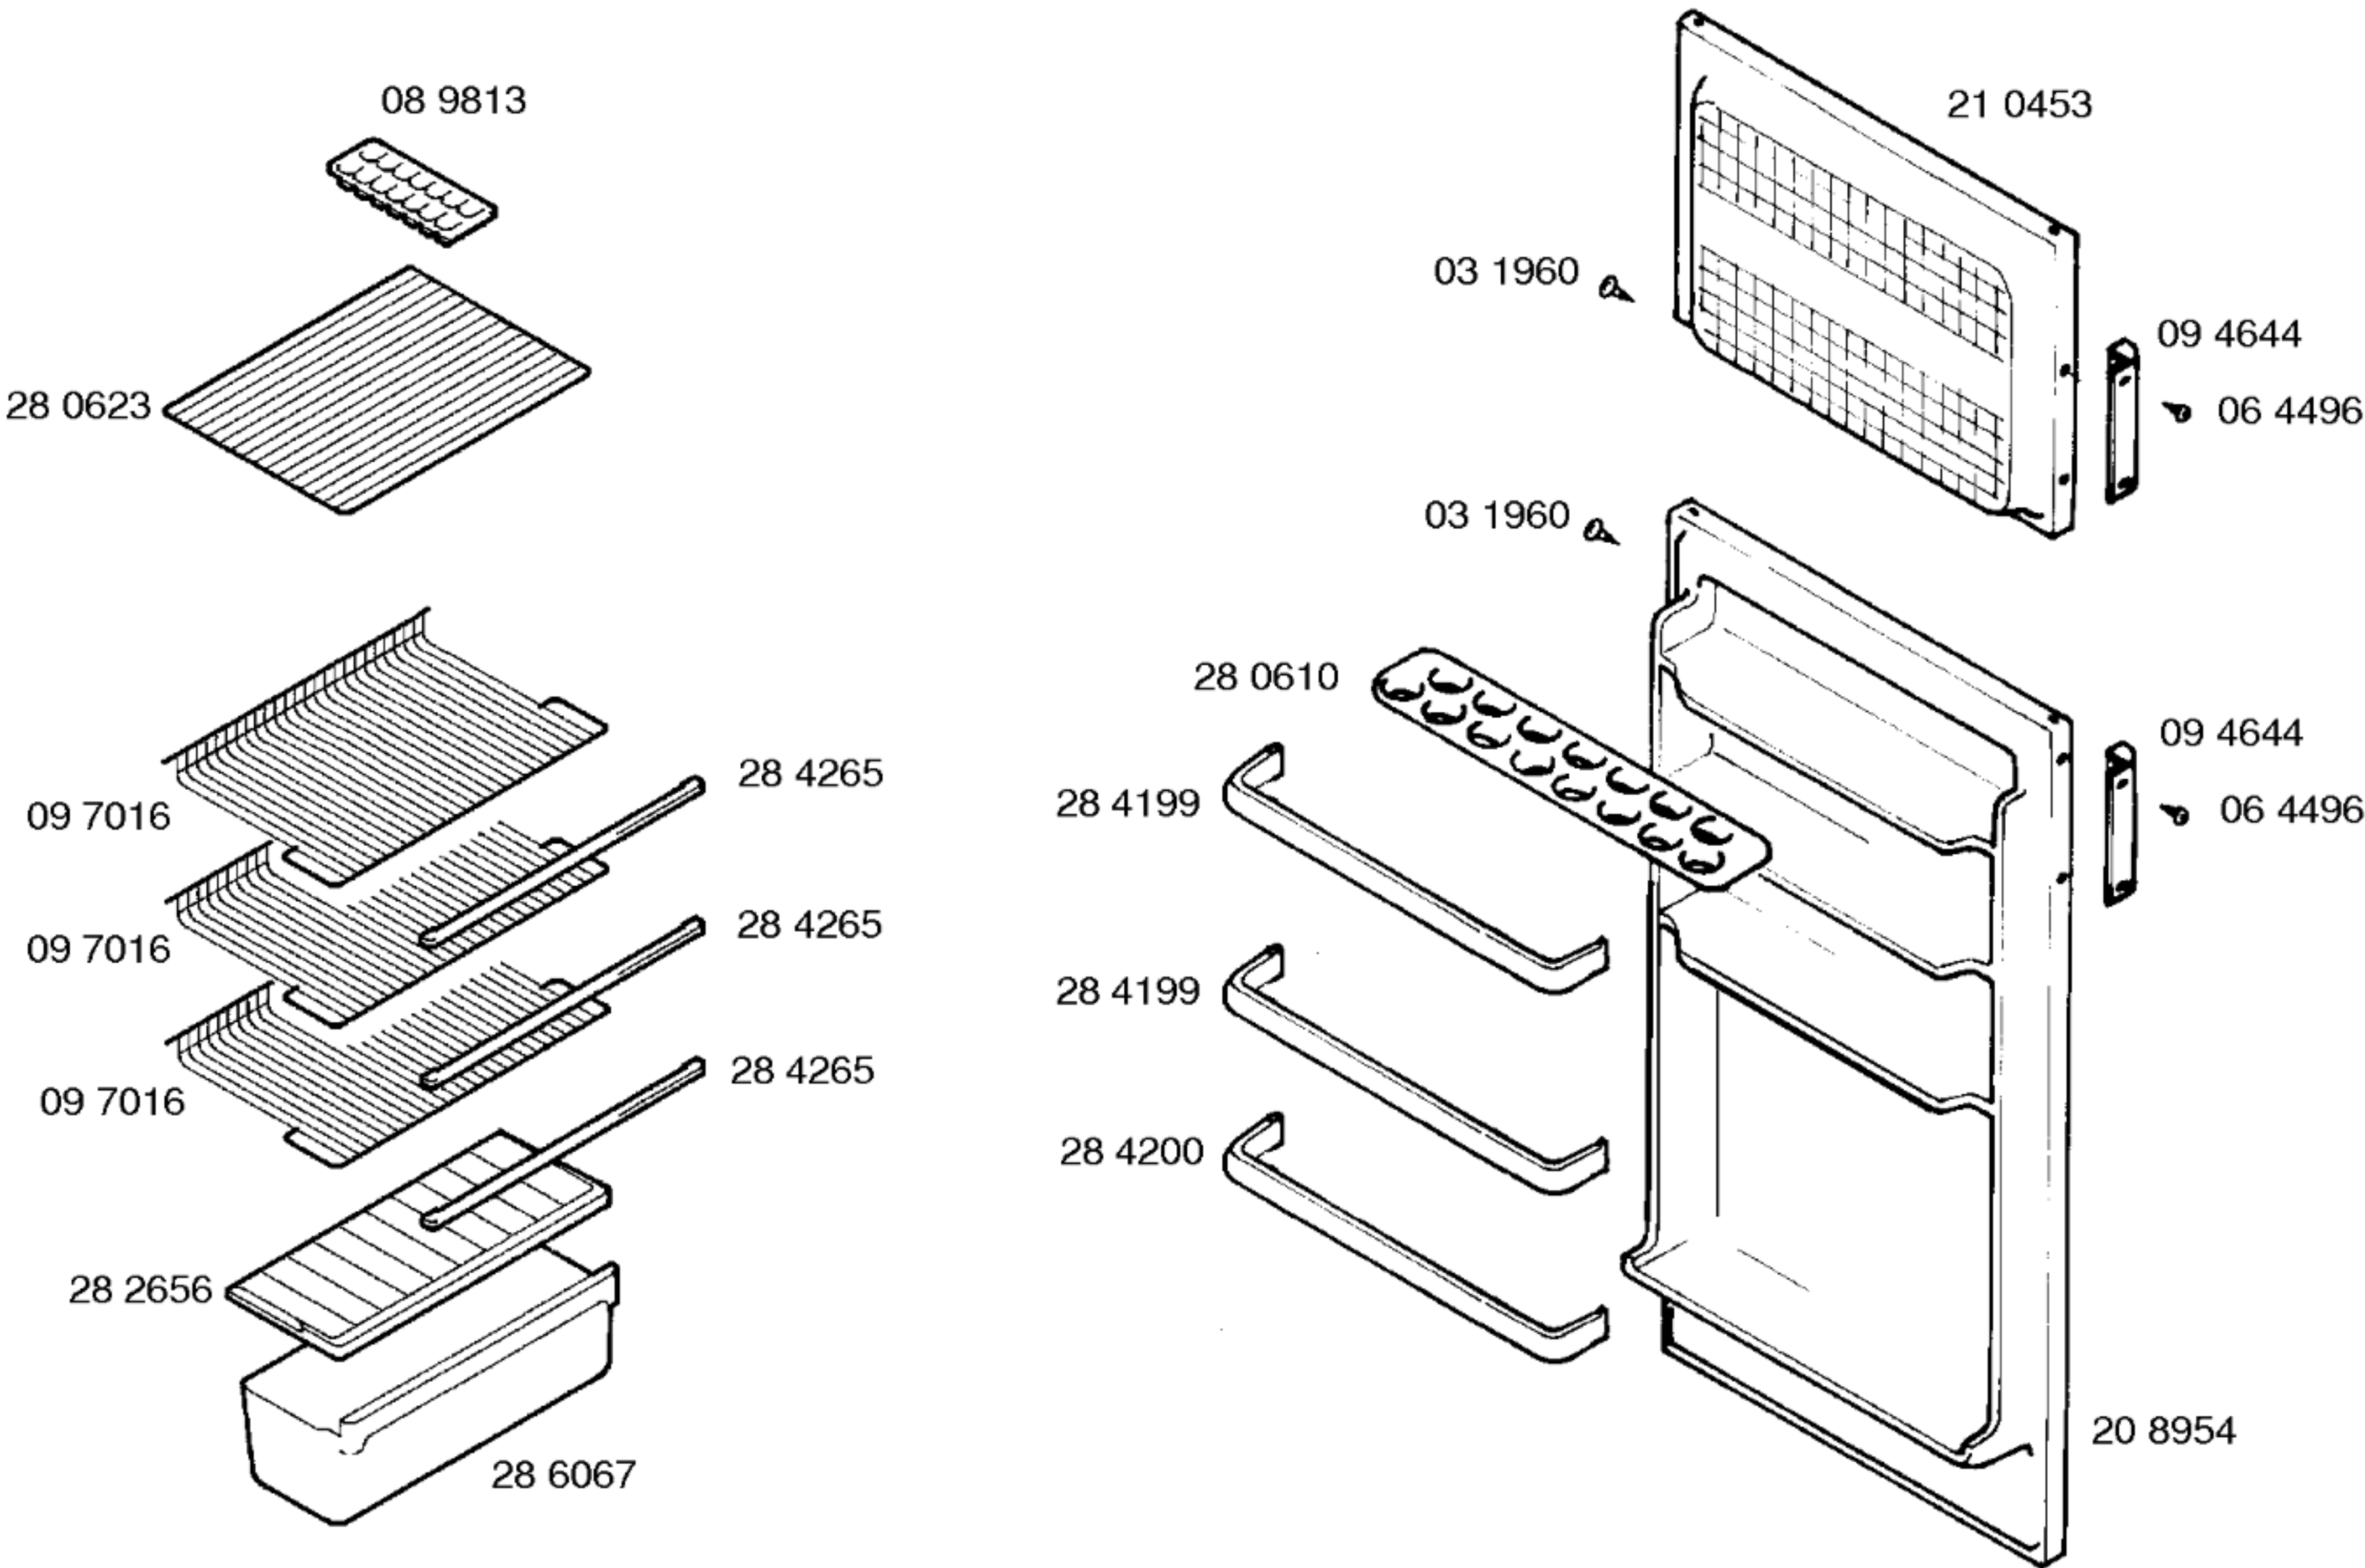

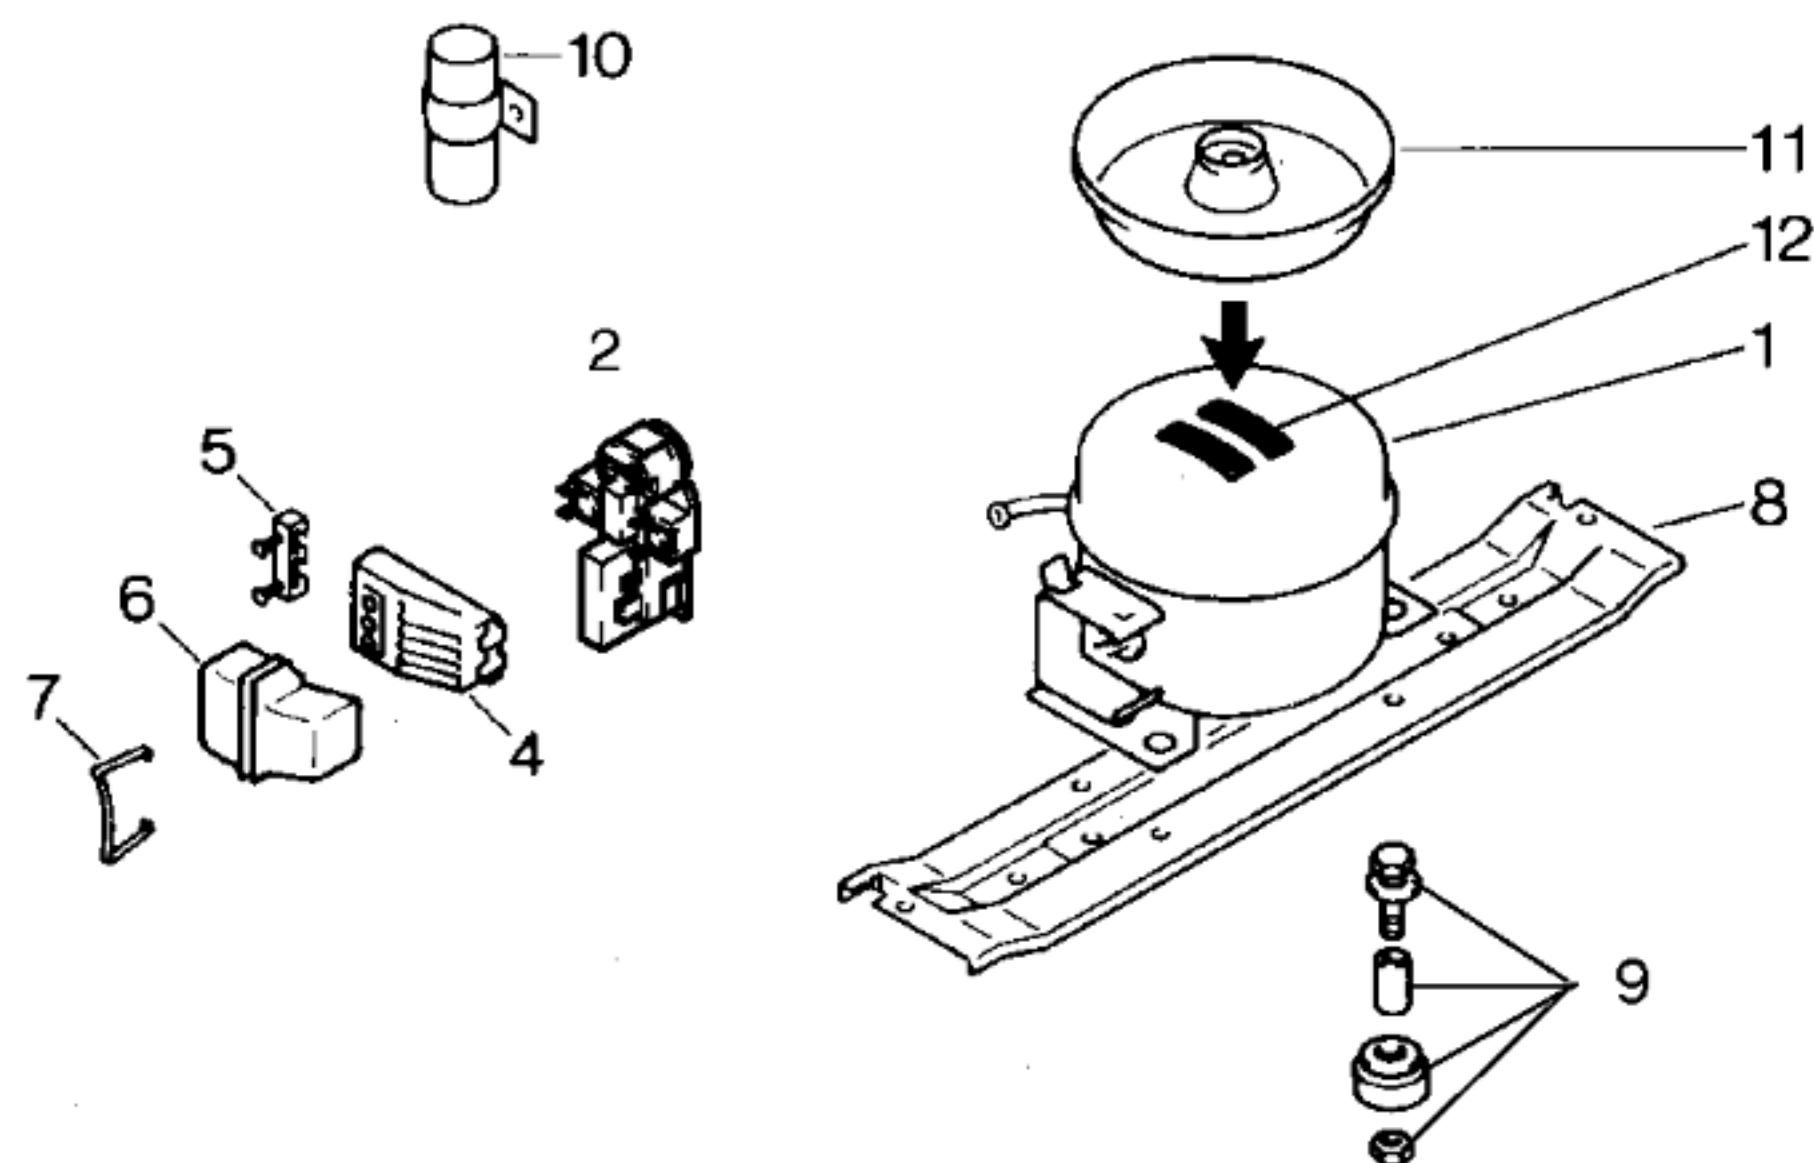

| Pos. | KÜHLGERÄTE | KHÜLGERÄTE |
|------|------------|------------|
|      | ZEM        | U. HERMÉT. |
|      | GL80AA     | GL80AA     |
| 1    | 14 1362    | 14 1339    |
| 2    | 15 4818    | 15 3984    |
| 3    |            |            |
| 4    |            |            |
| 5    |            |            |
| 6    |            |            |
| 7    |            |            |
| 8    | 28 9409    | 28 9409    |
| 9    | 05 0166    | 05 0166    |
| 10   |            |            |
| 11   | 09 6332    | 09 6332    |
| 12   |            |            |
| 13   |            |            |

| TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS                                                                                                                                                                             |                                           |                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------------|
| Verdichter/Compressor/Compresseur/Compresor<br>Typ/Type/Tipo<br>Förderleistung/Delivery/Debit/Aspiración l/h<br>Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A<br>Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm<br>Hi/aux. | ZEM<br>GL80AA<br><br>11,5<br>11,6<br>21,2 | U. Hermét.<br>GL80AA<br><br>11,5<br>11,6<br>20,8 |
| Temp.Reyler/Thermostat/Termostato<br>Typ/Type/Tipo<br>Reglerstellung/Position/Conexión<br>Schaltwerte/Switching values/ ..ein/conex.°C<br>Valeurs de commutation/Desconex. ..aus"/descon.<br>(..abtaven' od) ..alarm'                         | ATEA<br>MANUAL<br>+5°<br>-15°<br>-32°     |                                                  |
| Füllmenge/Fill. quantity/Charge/Carga 134a g                                                                                                                                                                                                  | 155                                       | 160                                              |
| Anschlußwert/Comm. load/puiss. Connect./Potenc. W                                                                                                                                                                                             | 162                                       | 162                                              |
| Heizung/Heater/Chaufrage/Resistenc.descong.<br>Widerstand/Resistance/Resistencia Ohm<br>Leistung/Power/Puissance/Potencia W                                                                                                                   | 3782<br>12,5                              |                                                  |
| Ventilador/Blower/Ventilateur/Ventilador<br>Widerstand/Resistance/Resistencia Ohm                                                                                                                                                             |                                           |                                                  |
| Magnetventil/Magnetic valve/Electrovanne/Electrovalvula<br>Widerstand/Resistance/Resistencia Ohm<br>Spannung/Volare/Tension/Tensión V                                                                                                         |                                           |                                                  |
| Temp.Reyler/Thermostat/Termostato ambiente para<br>ventilador refrigerador                                                                                                                                                                    |                                           |                                                  |